

# Flooring Fact Sheets



Virocfloor

Virodal

Unsanded Floor

Viroc Floor Panels

Technical Floor

Percussion Sounds

Sandwich Board

**Application:** Indoors

**Support structure:** Wood or Metal

**Fastening:** Screws and glue in the tongue & groove joints. Tongue & grooved on long edges only

**Surface:** Factory calibrated / sanded


**Thickness:** 19 mm ( $\frac{3}{4}$ " ), 22 mm ( $\frac{7}{8}$ " ), 25 mm (1" ), 28 mm (1  $\frac{1}{8}$ " ) or 32 mm (1  $\frac{1}{4}$ " ). Tolerance:  $\pm 0,5$  mm

**Board size:**

2440 x 1220 mm (96,00" x 48,00")

2600 x 1220 mm (102,36" x 48,00")

3000 x 1220 mm (118,11" x 48,00")

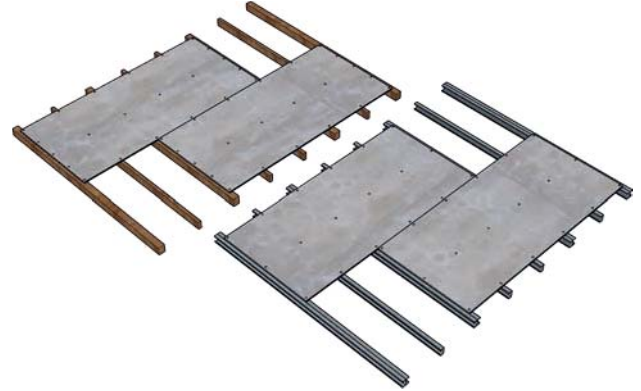

### 1. Description

Viroc is a cement bonded particle board. It is a composite material, composed by a compressed and dry mixture of pine wood particles and cement.

Its appearance is not homogeneous. A natural characteristic of the product is to have patches of various shades.

The Viroc panel is produced in different colours.

### 2. Relative humidity effect

Viroc boards have small size variations due to the air relative humidity.

The expected maximum size variation of the board for indoors would be +0.5‰ to -1.0 ‰.

The fastening system near the edges will have to take into account those size variations.

### 3. Application Conditions

Virocfloor is for indoor use only.

Before installation, the board must be exposed for 48 hours to the relative humidity of the location where it will be applied and should be left in a dry location out of direct sunlight.

It is the installer's responsibility to check the support structure conditions (distance between supports and respective width) for the correct application.

### 4. Support structure

Treated dry pine beams or metallic profiles of galvanized steel can be used to support the boards.

In the joints of two boards, the width of the beams must be at least 125mm (5") to respect the minimum distance of fasteners to the edge.

The structure that will support Viroc boards must be aligned and leveled and the board cannot be warped.

The spacing between the support components depends on the ultimate limit state safety criteria for resistance and deformation.

### 5. Fastening

Boards are fastened with screws, suitable for metallic or wood structure.

The tongue and groove joints between boards must be glued with a mastic bond.

Boards must be arranged alternately for the joints between boards do not match.

### 6. Surface treatment

Boards are factory calibrated/sanded. A primer can be applied on both surfaces by request.

The final finish may involve the traditional surfacing materials, vinyl fabric, ceramic tiles, wooden flooring, etc.

### Notes & recommendations

Please consult Viroc Product Data Sheet to know the board tolerances and properties.


Always check standard safety procedures and local legislation requirements.

Please contact the finishing suppliers for application procedures.

### 7. Fastening elements

#### Flat head screws for wood structure

IMAD C12-5.5x50 - Viroc 19 to 32mm




#### Flat head screws for metallic structure

IMET C12-5.5x38 - Viroc 19mm



IMET C12-5.5x45 - Viroc 22 to 25mm

IMET C12-5.5x55 - Viroc 28 to 32mm




NOTA: Please consult Viroc Technical File to get more information about the fastening systems.

### 8. Fixture position

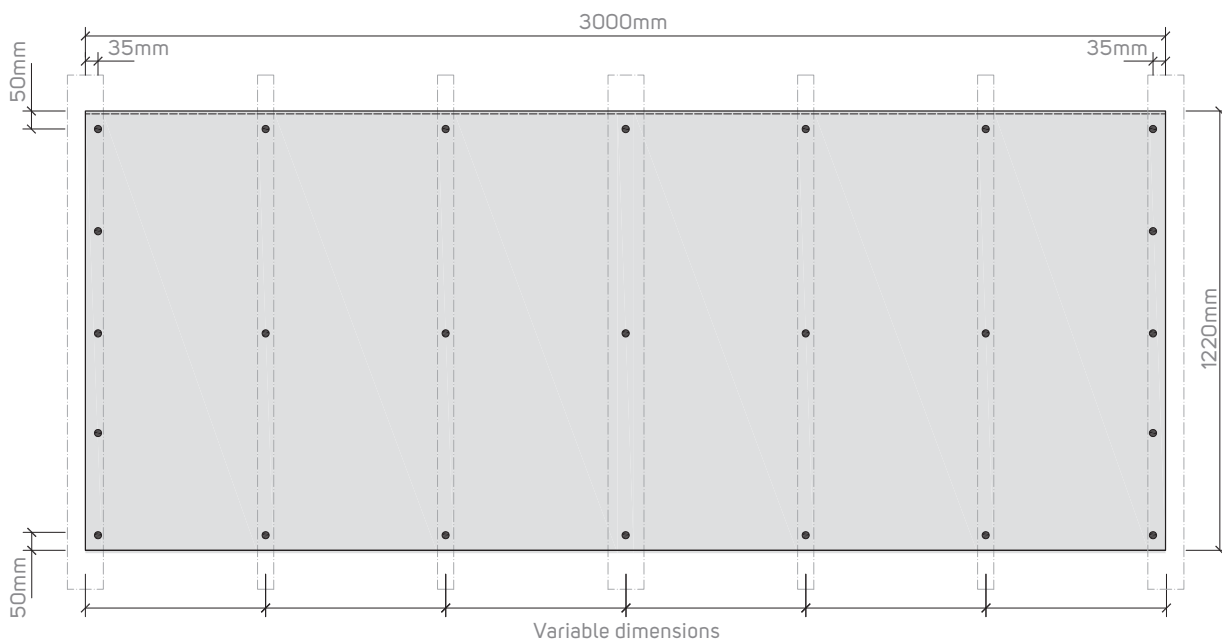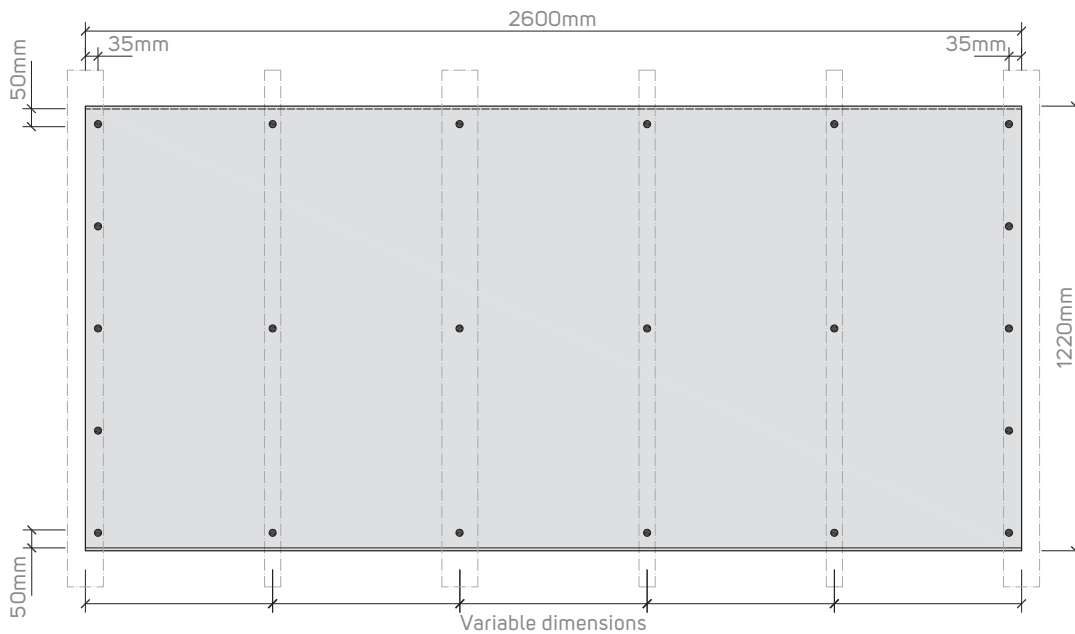


### 9. Support structure

Virocfloor board 2440 / 2600 / 3000 x 1220mm

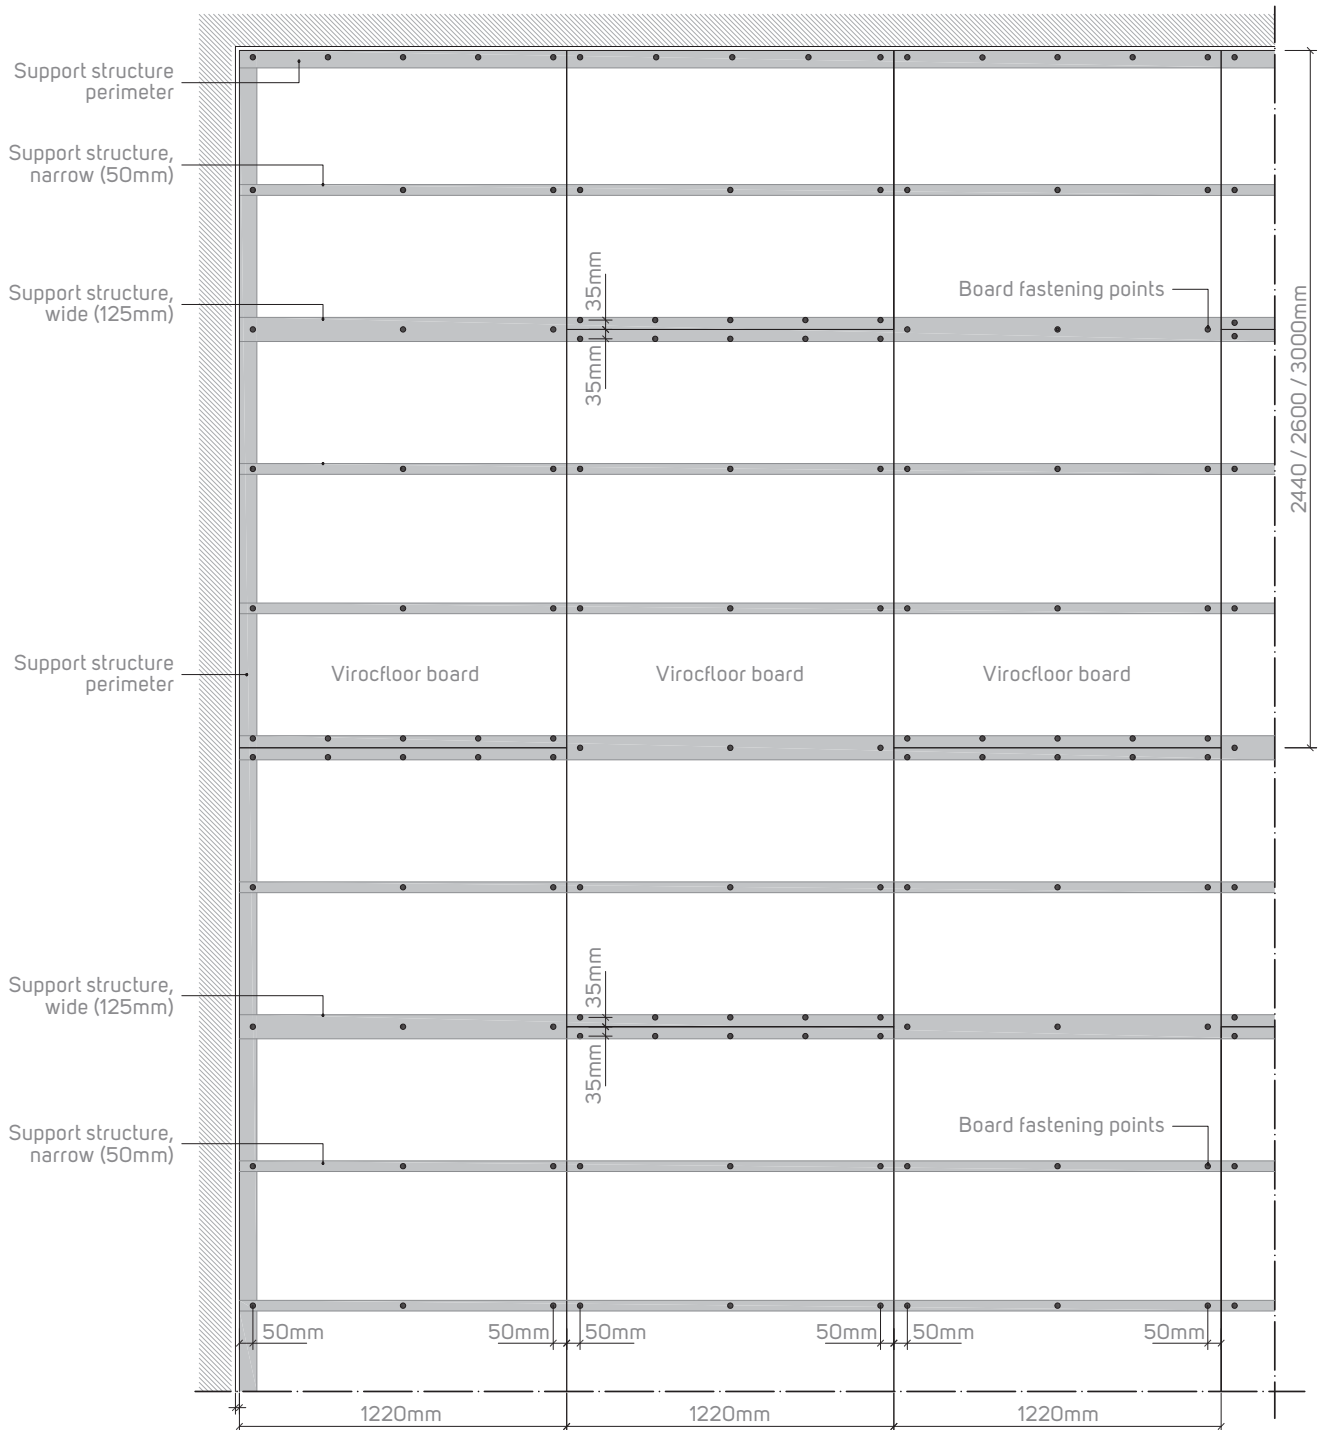


10. Construction details (wood structure)

Transversal section

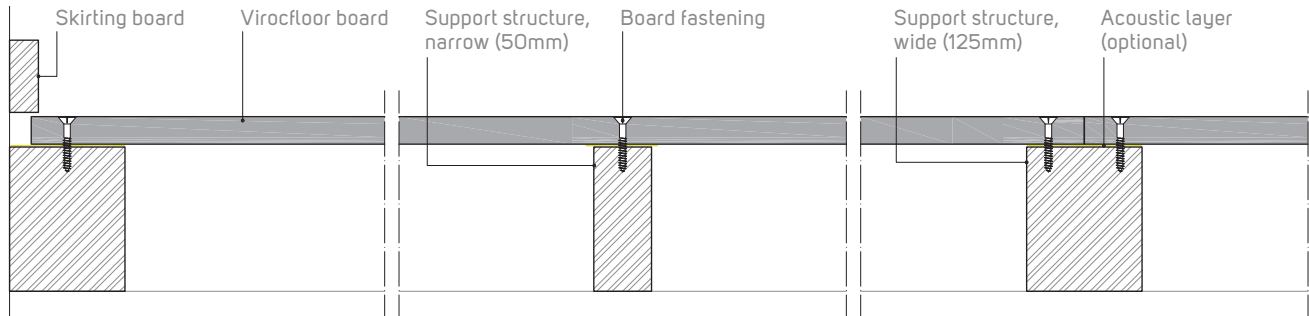


Longitudinal section

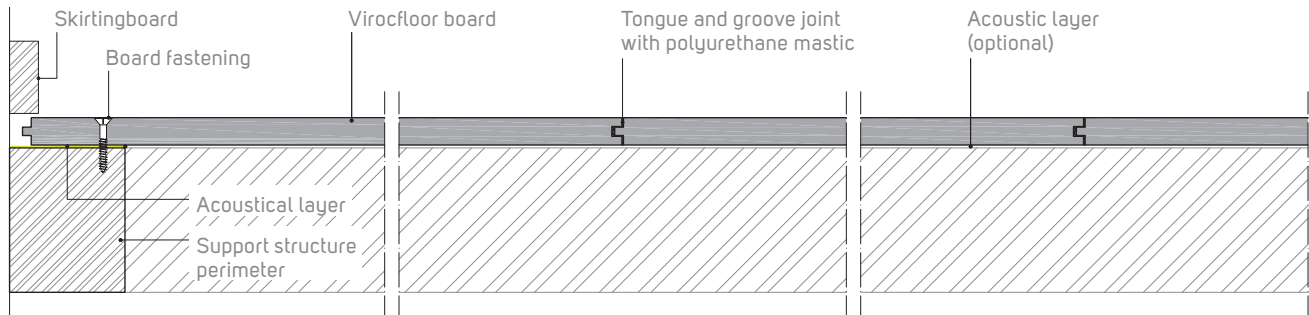


11. Construction details (steel structure)



Transversal section

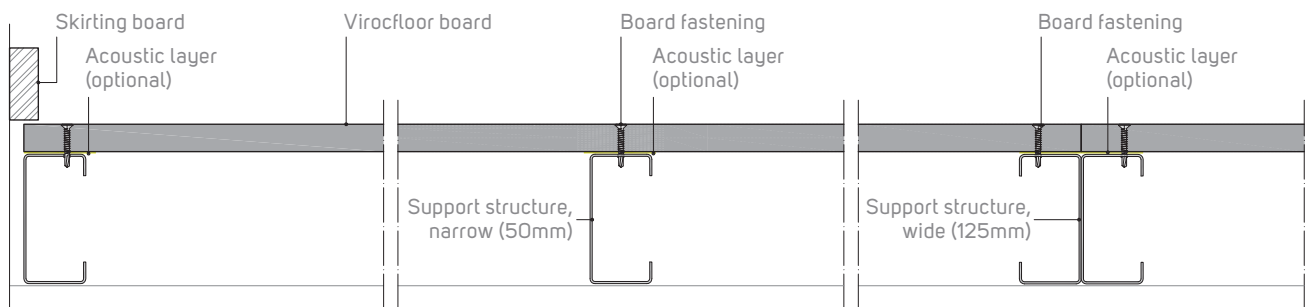

Longitudinal section

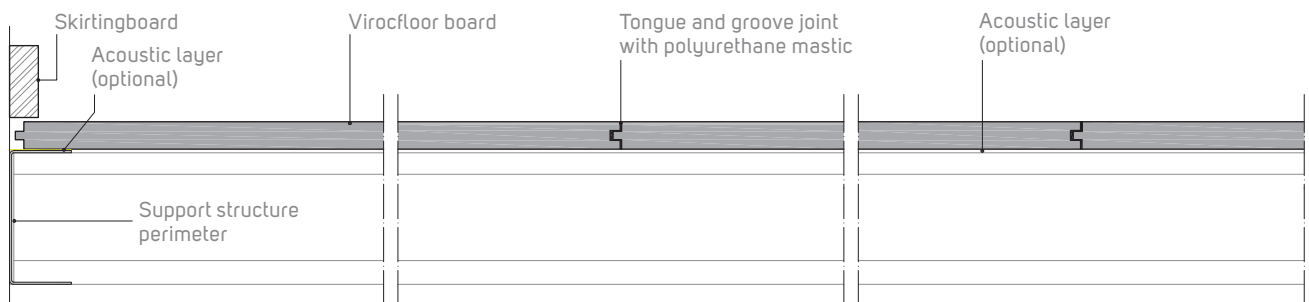


12. Detail of the joint

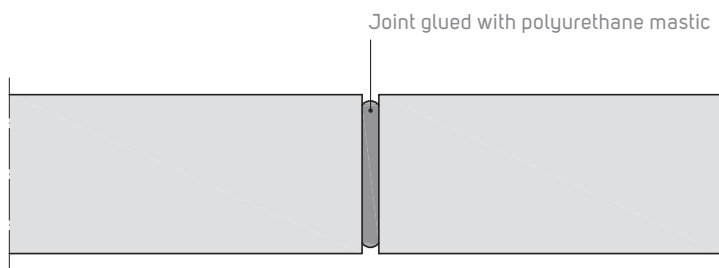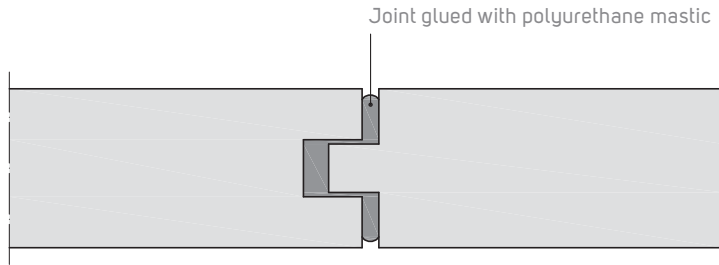

### 13. Load table

Uniformly distributed load table

$q_k$  (kN/m<sup>2</sup>) - Static load

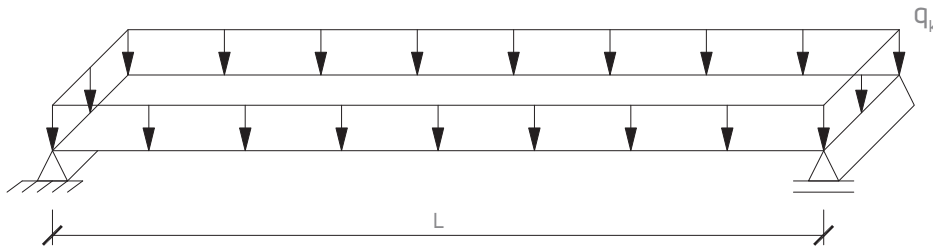

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                      4500 N/mm<sup>2</sup>

#### Board resistance

L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
10	4,31	2,37	1,47	0,98	0,68	0,49	0,36	0,27
12	6,24	3,44	2,14	1,44	1,01	0,74	0,55	0,41
16	11,16	6,18	3,88	2,63	1,87	1,38	1,05	0,81
19	15,79	8,77	5,52	3,75	2,69	2,00	1,53	1,19
22	21,21	11,80	7,45	5,08	3,65	2,73	2,09	1,64
25	27,44	15,29	9,66	6,61	4,76	3,57	2,75	2,16
28	34,47	19,22	12,17	8,33	6,02	4,52	3,49	2,76
32	45,08	25,17	15,95	10,95	7,93	5,97	4,62	3,66

#### Deformation limit L/300


L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
10	3,42	1,37	0,63	0,31	0,14	0,05	0,00	0,00
12	5,98	2,43	1,17	0,61	0,32	0,16	0,07	0,00
16	11,16	5,93	2,93	1,60	0,93	0,55	0,32	0,18
19	15,79	8,77	5,01	2,79	1,66	1,03	0,65	0,40
22	21,21	11,80	7,45	4,44	2,68	1,70	1,11	0,73
25	27,44	15,29	9,66	6,61	4,04	2,59	1,72	1,16
28	34,47	19,22	12,17	8,33	5,77	3,74	2,51	1,73
32	45,08	25,17	15,95	10,95	7,93	5,71	3,88	2,71

■ Values conditioned by the board's resistance

#### 14. Load table

Midspan concentrated load table

$Q_k$  (kN/m) - Static load

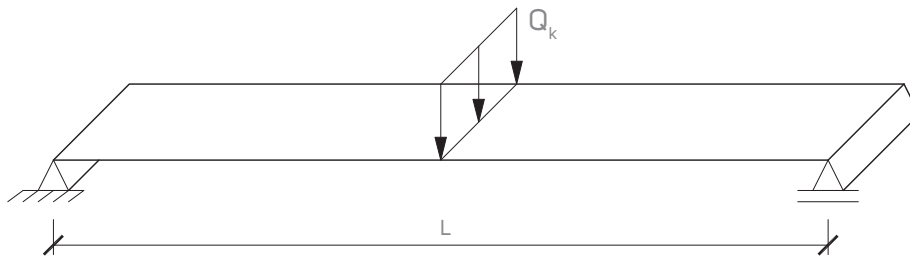

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                        4500 N/mm<sup>2</sup>

#### Board resistance

	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	10	0,65	0,47	0,37	0,29	0,24	0,20	0,16	0,13
	12	0,94	0,69	0,54	0,43	0,35	0,30	0,25	0,21
	16	1,67	1,24	0,97	0,79	0,66	0,55	0,47	0,40
	19	2,37	1,75	1,38	1,13	0,94	0,80	0,69	0,59
	22	3,18	2,36	1,86	1,52	1,28	1,09	0,94	0,82
	25	4,12	3,06	2,42	1,98	1,67	1,43	1,24	1,08
	28	5,17	3,84	3,04	2,50	2,11	1,81	1,57	1,38
	32	6,76	5,03	3,99	3,28	2,77	2,39	2,08	1,83

#### Deformation limit L/300

	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	10	0,64	0,34	0,20	0,12	0,06	0,03	0,00	0,00
	12	0,94	0,61	0,36	0,23	0,14	0,08	0,04	0,00
	16	1,67	1,24	0,92	0,60	0,41	0,28	0,18	0,11
	19	2,37	1,75	1,38	1,05	0,73	0,51	0,36	0,25
	22	3,18	2,36	1,86	1,52	1,17	0,85	0,62	0,45
	25	4,12	3,06	2,42	1,98	1,67	1,30	0,97	0,73
	28	5,17	3,84	3,04	2,50	2,11	1,81	1,41	1,08
	32	6,76	5,03	3,99	3,28	2,77	2,39	2,08	1,70

■ Values conditioned by the board's resistance



## 15. Design

The design of the panel is performed in accordance with the requirements of Eurocode 5 (EN 1995-1-1).


Feature	Symbol	Value	
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>	
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>	
Modulus of elasticity	E	4500 N/mm <sup>2</sup>	
Modification factor	$k_{mod}$	Permanent action	0.30
		Long term action	0.45
		Medium term action	0.65
		Short term action	0.85
		Instantaneous action	1.10
Deformation factor	$k_{def}$	2.25	
Partial factor for material properties	$\gamma_M$	1.3	

## Technical Support

The Viroc disposes of a department that can provide technical support to its customers in the security checks.

## Example 1

### Security verifications - Static uniform load

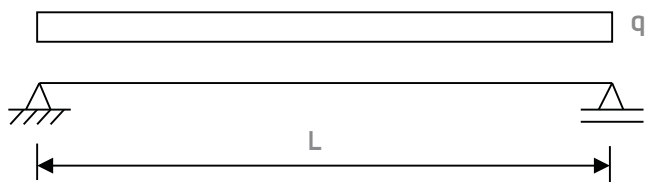

## Characteristics

Span  $L$  0.500 m

## Actions EN 1991-1-6 (Eurocode 1)

Covering  $c_v$  1.00 kN/m<sup>2</sup>

Variable loads  $q_k$  4.00 kN/m<sup>2</sup>

**Characteristics of Viroc board**

Board thickness	$e$	28mm
Viroc density	$\gamma$	13.5 kN/m <sup>3</sup>
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>
Modification factor (long term action)	$k_{mod}$	0.45
Deformation factor	$k_{def}$	2.25
Partial factor properties	$\gamma_M$	1.3
Self weight	$PP$	0.38 kN/m <sup>2</sup>

**Ultimate limit states EN 1995-1-1 (Eurocode 5)**

Permanent loads ( pp + cv )	$g_k$	1.38 kN/m <sup>2</sup>
Variable loads	$q_k$	4.00 kN/m <sup>2</sup>

**Design loads**

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	$q_{Sd}$	7.86 kN/m <sup>2</sup>
--	----------	------------------------

**Ultimate limit states of flexion**

$M_{Sd,max} = q_{Sd} \cdot L^2 / 8$	$M_{Sd,max}$	0.25 kNm/m
$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$	$M_{Rd}$	0.41 kNm/m    Security checked ( $M_{Rd} \geq M_{Sd,max}$ )
$w = b \cdot e^2 / 6$		

**Ultimate limit states of shear**


$V_{S,max} = q_{Sd} \cdot L / 2$	$V_{S,max}$	1.97 kN/m
$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$	$V_{Rd}$	8.08 kN/m    Security checked ( $V_{Rd} \geq V_{Sd,max}$ )
$A_v = 5 / 6 \cdot b \cdot e$		

**Limit states of deformation**

Factor for quasi-permanent combination	$\Psi_2$	0.6
$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$	$q_s$	3.78 kN/m <sup>2</sup>
$I = b \cdot e^3 / 12$	$I$	1829333 mm <sup>4</sup>
$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$	$E_{mean,fin}$	1915 N/mm <sup>2</sup>
Deformation		
$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI)$	$f_{max}$	0.88 mm
Maximal deformation	$L / 300$	1.67 mm    Deformation verified ( $f_{max} \leq L / 300$ )

Example 2

Security verifications - Static concentrated loads

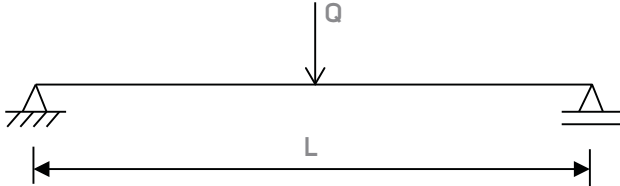

Characteristics

Span	$L$	0.500 m
------	-----	---------

Actions EN 1991-1-6 (Eurocode 1)

Covering	$cv$	1.00 kN/m <sup>2</sup>
Variable loads	$Q_k$	1.50 kN

Characteristics of Viroc board

Board thickness	$e$	28mm
Viroc density	$\gamma$	13.5 kN/m <sup>3</sup>
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>
Modification factor (long term action)	$k_{mod}$	0.45
Deformation factor	$k_{def}$	2.25
Partial factor properties	$\gamma_M$	1.3
Self weight	$pp$	0.38 kN/m <sup>2</sup>

Ultimate limit states EN 1995-1-1 (Eurocode 5)

Permanent loads ( $pp + cv$ )	$g_k$	1.38 kN/m <sup>2</sup>
Variable loads	$Q_k$	1.50 kN

Design loads

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	Uniform loads	$q_{Sd}$	1.86 kN/m <sup>2</sup>
	Concentrated loads	$Q_{Sd}$	2.25 kN

**Ultimate limit states of flexion**

$$M_{Sd,max} = q_{sd} L^2 / 8 + Q_{sd} L / 4$$

$$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$$

$$w = b \cdot e^2 / 6$$

$$M_{Sd,max} \quad 0.34 \text{ kNm/m}$$

$$M_{Rd} \quad 0.41 \text{ kNm/m} \quad \text{Security checked ( } M_{Rd} \geq M_{Sd,max} \text{ )}$$

**Ultimate limit states of shear**

$$V_{S,max} = q_{sd} L / 2 + Q_{sd} / 2$$

$$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$$

$$A_v = 5 / 6 \cdot b \cdot e$$

$$V_{S,max} \quad 1.59 \text{ kN/m}$$

$$V_{Rd} \quad 8.08 \text{ kN/m} \quad \text{Security checked ( } V_{Rd} \geq V_{Sd,max} \text{ )}$$

**Limit states of deformation**

Factor for quasi-permanent combination

$$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$$

$$I = b \cdot e^3 / 12$$

$$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$$

Deformation

$$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI) + Q_s \cdot L^3 / (48 \cdot EI)$$

Maximal deformation

$$\Psi_2 \quad 0.6$$

$$q_s \quad 1.38 \text{ kN/m}^2$$

$$Q_s \quad 0.90 \text{ kN}$$

$$I \quad 1829333 \text{ mm}^4$$

$$E_{mean,fin} \quad 1915 \text{ N/mm}^2$$

$$f_{max} \quad 0.99 \text{ mm}$$

$$L / 300 \quad 1.67 \text{ mm} \quad \text{Deformation verified ( } f_{max} \leq L / 300 \text{ )}$$

**Application:** Indoors

**Support structure:** Wood or Metal

**Fastening:** Screws and glue in the tongue & groove joints. Tongue & grooved on all four edges


**Surface:** Factory calibrated / sanded

**Thickness:** 18 mm (11/16"), 21 mm (13/16"), 24 mm (15/16") or 28 mm (1 1/8"). Tolerance: ± 0,3 mm

**Board size:**

1200 x 600 mm (47,24" x 23,62")

1500 x 600 mm (59,00" x 23,62")

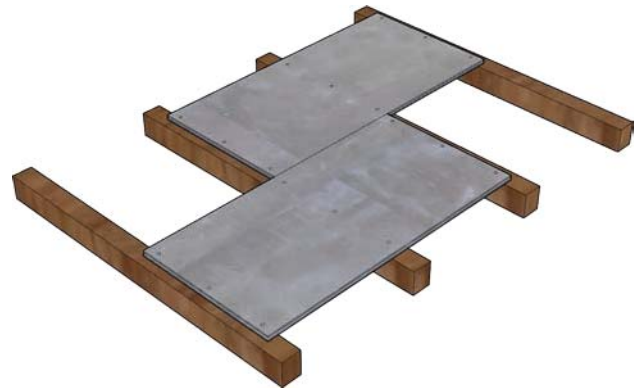

### 1. Description

Viroc is a cement bonded particle board. It is a composite material, composed by a compressed and dry mixture of pine wood particles and cement.

Its appearance is not homogeneous. A natural characteristic of the product is to have patches of various shades.

The Viroc panel is produced in different colours.

### 2. Relative humidity effect

Viroc boards have small size variations due to the air relative humidity.

The expected maximum size variation of the board for indoors would be +0.5‰ to -1.0 ‰.

The fastening system near the edges will have to take into account those size variations.

### 3. Application Conditions

Virodal is for indoor use only.

Before installation, the board must be exposed for 48 hours to the relative humidity of the location where it will be applied and should be left in a dry location out of direct sunlight.

It is the installer's responsibility to check the support structure conditions (distance between supports and respective width) for the correct application.

### 4. Support structure

Treated dry pine beams or metallic profiles of galvanized steel can be used to support the boards.

In the joints of two boards, the width of the beams must be at least 125mm (5") to respect the minimum distance of fasteners to the edge.

The structure that will support Viroc boards must be aligned and leveled and the board cannot be warped.

The spacing between the support components depends on the ultimate limit state safety criteria for resistance and deformation.

### 5. Fastening

Boards are fastened with screws, suitable for metallic or wood structure.

The tongue and groove joints between boards must be glued with a mastic bond.

Boards must be arranged alternately for the joints between boards do not match.

### 6. Surface treatment

Boards are factory calibrated/sanded.

The final finish may involve the traditional surfacing materials, vinyl fabric, ceramic tiles, wooden flooring, etc.

### Notes & recommendations

Please consult Viroc Product Data Sheet to know the board tolerances and properties.


Always check standard safety procedures and local legislation requirements.

Please contact the finishing suppliers for application procedures.

## 7. Fastening elements

### Flat head screws for wood structure

IMAD C12-5.5x50 - Viroc 19 to 32mm




### Flat head screws for metallic structure

IMET C12-5.5x38 - Viroc 18mm



IMET C12-5.5x45 - Viroc 21 to 24mm

IMET C12-5.5x55 - Viroc 28mm




NOTA: Please consult Viroc Technical File to get more information about the fastening systems.

## 8. Fixture position

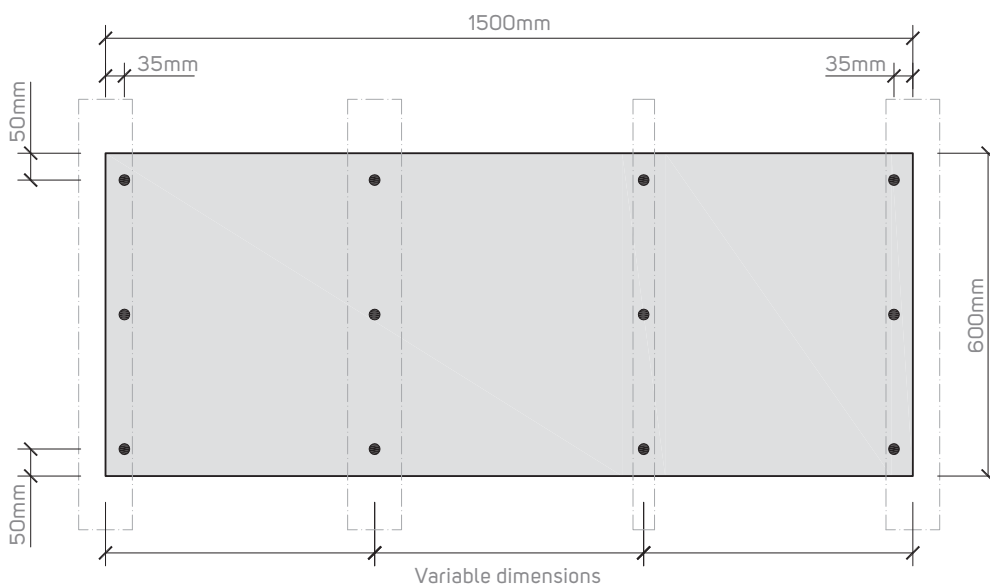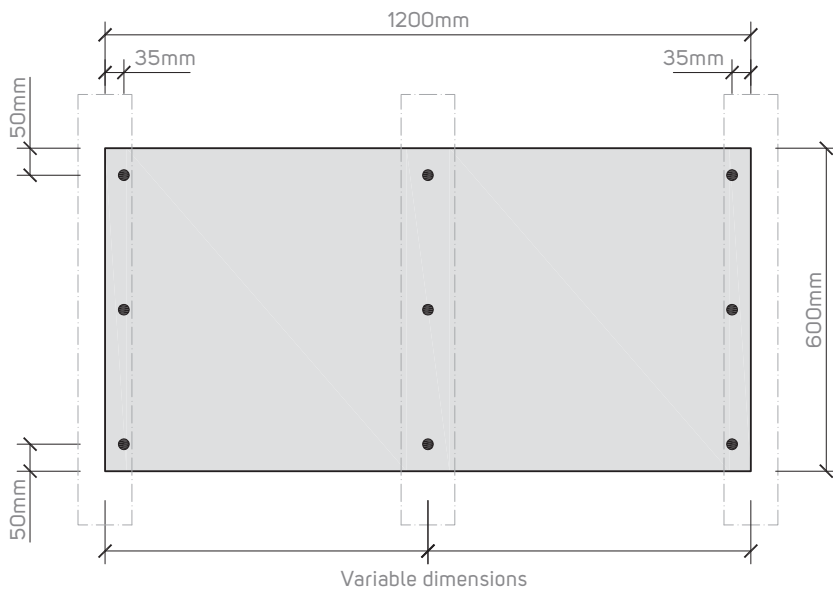


**9. Support structure**

Virodal board 1200 / 1500 x 600mm

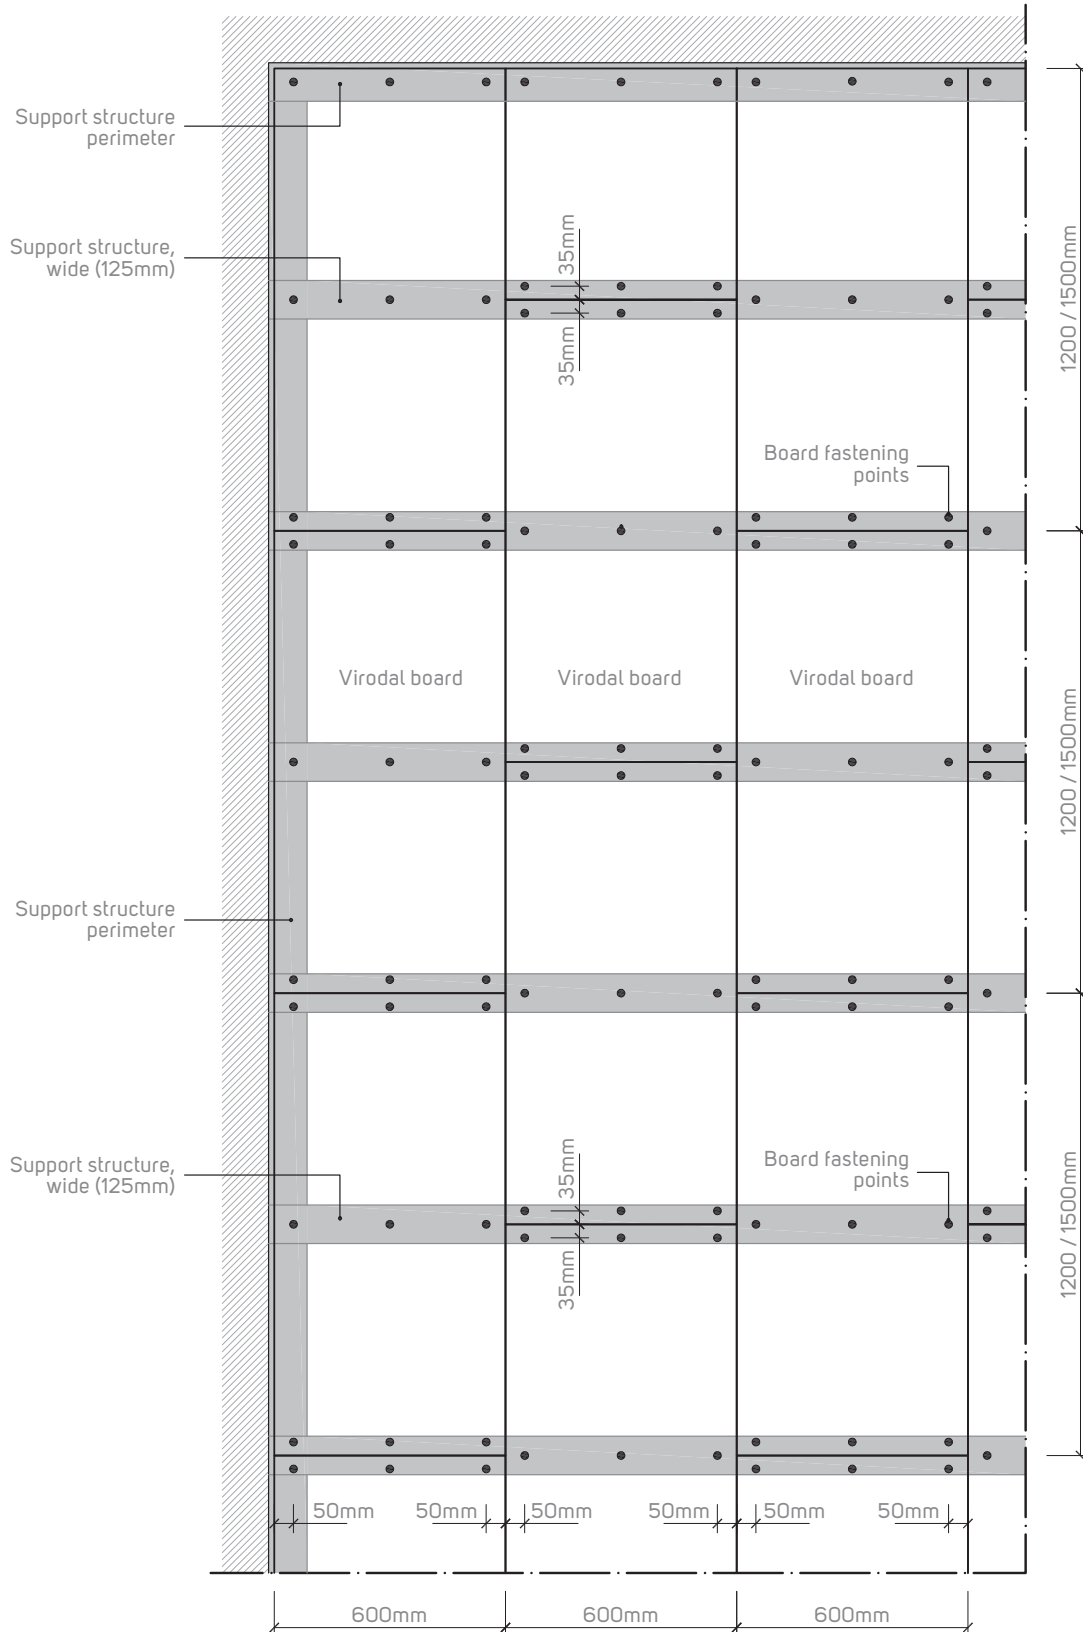


**10. Construction details (wood structure)**

**Transversal section**

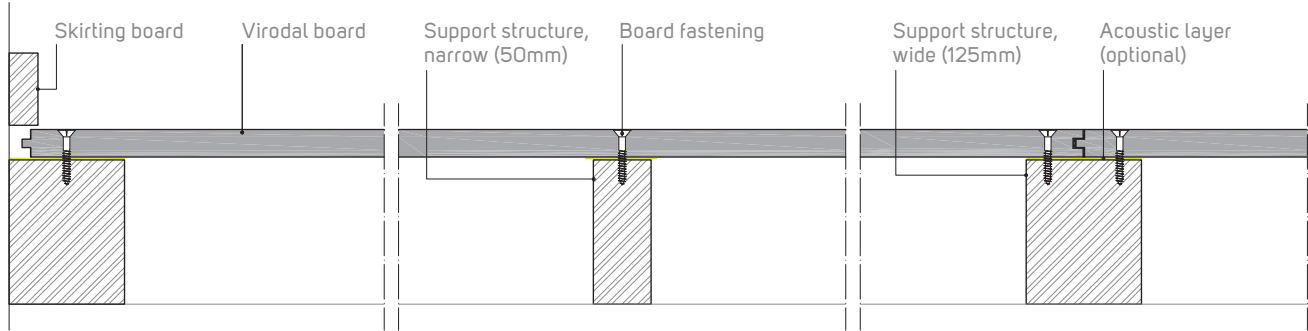


**Longitudinal section**

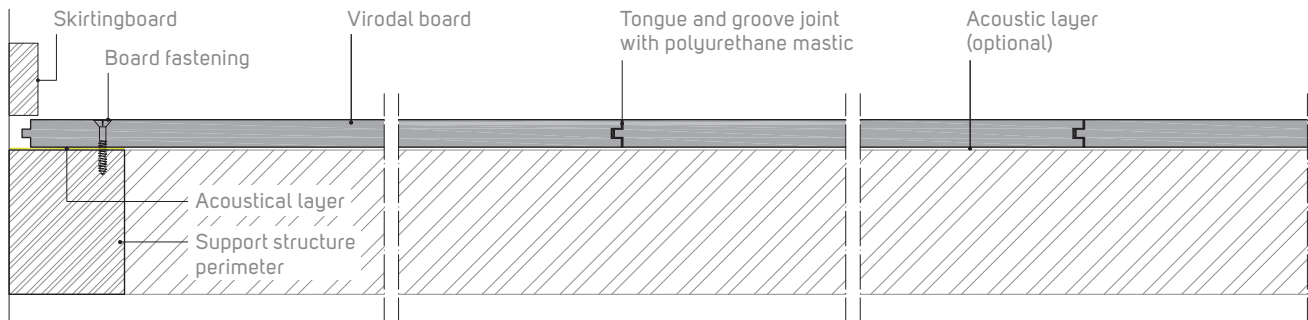


**11. Construction details (steel structure)**

**Transversal section**

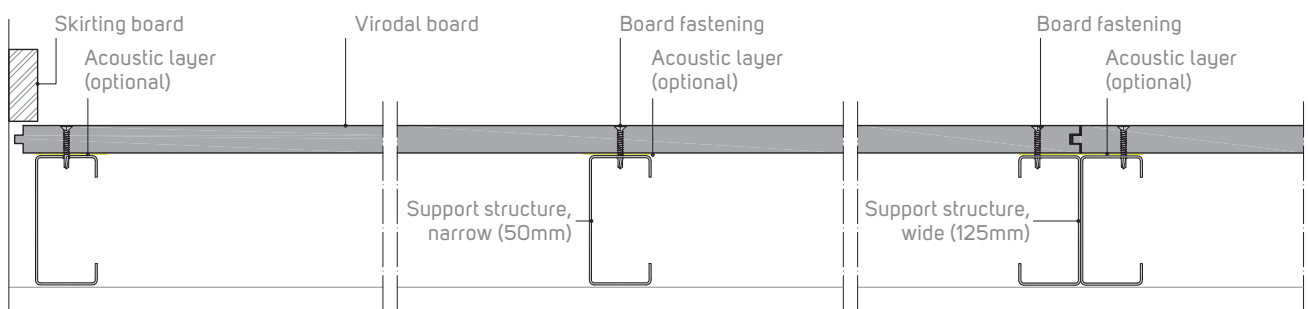


**Longitudinal section**

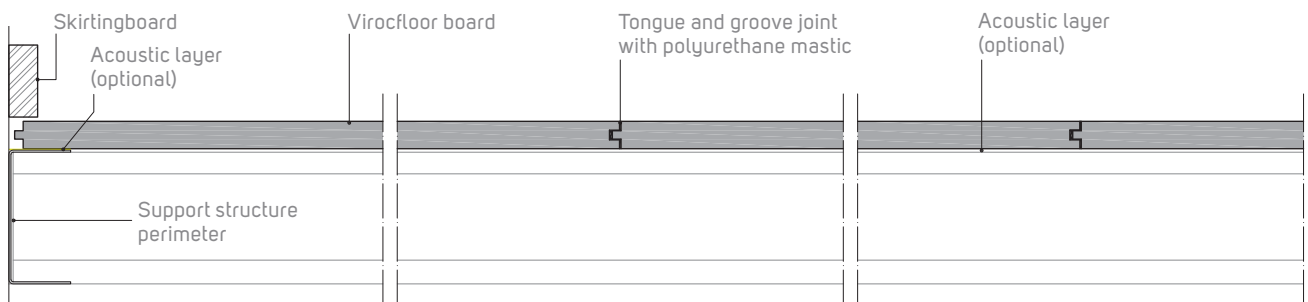




### 12. Detail of the joint

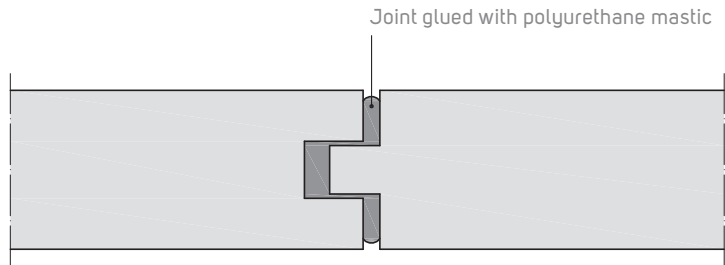

### 13. Load table

Uniformly distributed load table  
 $q_k$  (kN/m<sup>2</sup>) - Static load

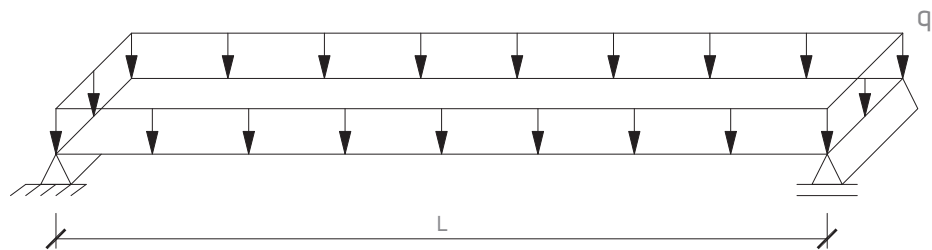

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                        4500 N/mm<sup>2</sup>

#### Board resistance

	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	18	14,16	7,86	4,94	3,36	2,40	1,78	1,36	1,05
	21	19,32	10,74	6,77	4,62	3,32	2,47	1,89	1,48
	24	25,28	14,08	8,89	6,08	4,38	3,28	2,52	1,98
	28	34,47	19,22	12,17	8,33	6,02	4,52	3,49	2,76

#### Deformation limit L/300


	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	10	14,16	7,86	4,24	2,35	1,39	0,85	0,53	0,32
	12	19,32	10,74	6,77	3,83	2,31	1,45	0,94	0,61
	16	25,28	14,08	8,89	5,82	3,55	2,27	1,50	1,00
	19	34,47	19,22	12,17	8,33	5,77	3,74	2,51	1,73

■ Values conditioned by the board's resistance

#### 14. Load table

Midspan concentrated load table

$Q_k$  (kN/m) - Static load

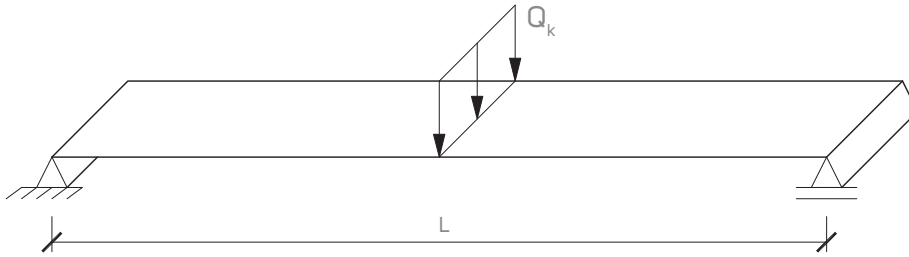

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                        4500 N/mm<sup>2</sup>

#### Board resistance

L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm) 18	2,12	1,57	1,24	1,01	0,84	0,71	0,61	0,53
21	2,90	2,15	1,69	1,38	1,16	0,99	0,85	0,74
24	3,79	2,82	2,22	1,82	1,53	1,31	1,13	0,99
28	5,17	3,84	3,04	2,50	2,11	1,81	1,57	1,38

#### Deformation limit L/300

L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm) 18	2,12	1,57	1,24	0,88	0,61	0,43	0,30	0,20
21	2,90	2,15	1,69	1,38	1,01	0,73	0,53	0,38
24	3,79	2,82	2,22	1,82	1,53	1,31	0,84	0,63
28	5,17	3,84	3,04	2,50	2,11	1,81	1,41	1,08

■ Values conditioned by the board's resistance

### 15. Design

The design of the panel is performed in accordance with the requirements of Eurocode 5 (EN 1995-1-1).


Feature	Symbol	Value	
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>	
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>	
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>	
Modification factor	$k_{mod}$	Permanent action	0.30
		Long term action	0.45
		Medium term action	0.65
		Short term action	0.85
		Instantaneous action	1.10
Deformation factor	$k_{def}$	2.25	
Partial factor for material properties	$\gamma_M$	1.3	

### Technical Support

The Viroc disposes of a department that can provide technical support to its customers in the security checks.

### Example 1

#### Security verifications - Static uniform load

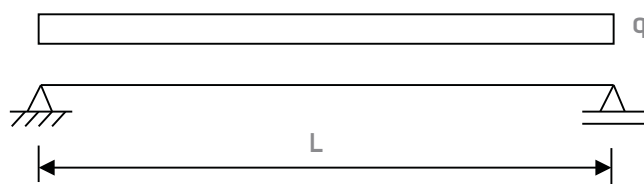

#### Characteristics

Span  $L$  0.500 m

#### Actions EN 1991-1-6 (Eurocode 1)

Covering  $c_v$  1.00 kN/m<sup>2</sup>

Variable loads  $q_k$  4.00 kN/m<sup>2</sup>

**Characteristics of Viroc board**

Board thickness	$e$	28mm
Viroc density	$\gamma$	13.5 kN/m <sup>3</sup>
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>
Modification factor (long term action)	$k_{mod}$	0.45
Deformation factor	$k_{def}$	2.25
Partial factor properties	$\gamma_M$	1.3
Self weight	$pp$	0.38 kN/m <sup>2</sup>

**Ultimate limit states EN 1995-1-1 (Eurocode 5)**

Permanent loads ( $pp + cv$ )	$g_k$	1.38 kN/m <sup>2</sup>
Variable loads	$q_k$	4.00 kN/m <sup>2</sup>

**Design loads**

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	$q_{Sd}$	7.86 kN/m <sup>2</sup>
--	----------	------------------------

**Ultimate limit states of flexion**

$M_{Sd,max} = q_{Sd} L^2 / 8$	$M_{Sd,max}$	0.25 kNm/m
$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$	$M_{Rd}$	0.41 kNm/m    Security checked ( $M_{Rd} \geq M_{Sd,max}$ )
$w = b \cdot e^2 / 6$		

**Ultimate limit states of shear**


$V_{S,max} = q_{Sd} L / 2$	$V_{S,max}$	1.97 kN/m
$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$	$V_{Rd}$	8.08 kN/m    Security checked ( $V_{Rd} \geq V_{Sd,max}$ )
$A_v = 5 / 6 \cdot b \cdot e$		

**Limit states of deformation**

Factor for quasi-permanent combination	$\Psi_2$	0.6
$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$	$q_s$	3.78 kN/m <sup>2</sup>
$I = b \cdot e^3 / 12$	$I$	1829333 mm <sup>4</sup>
$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$	$E_{mean,fin}$	1915 N/mm <sup>2</sup>
Deformation		
$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI)$	$f_{max}$	0.88 mm
Maximal deformation	$L / 300$	1.67 mm    Deformation verified ( $f_{max} \leq L / 300$ )

Example 2

Security verifications - Static concentrated loads

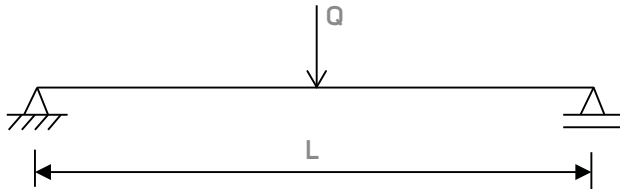

Characteristics

Span	L	0.500 m
------	---	---------

Actions EN 1991-1-6 (Eurocode 1)

Covering	cv	1.00 kN/m <sup>2</sup>
Variable loads	Q <sub>k</sub>	1.50 kN

Characteristics of Viroc board

Board thickness	e	28mm
Viroc density	γ	13.5 kN/m <sup>3</sup>
Bending strength	f <sub>m,k</sub>	9.0 N/mm <sup>2</sup>
Shear strength	f <sub>v,k</sub>	1.0 N/mm <sup>2</sup>
Modulus of elasticity	E	4500 N/mm <sup>2</sup>
Modification factor (long term action)	k <sub>mod</sub>	0.45
Deformation factor	k <sub>def</sub>	2.25
Partial factor properties	γ <sub>M</sub>	1.3
Self weight	pp	0.38 kN/m <sup>2</sup>

Ultimate limit states EN 1995-1-1 (Eurocode 5)

Permanent loads ( pp + cv )	g <sub>k</sub>	1.38 kN/m <sup>2</sup>
Variable loads	Q <sub>k</sub>	1.50 kN

Design loads

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	Uniform loads	q <sub>Sd</sub>	1.86 kN/m <sup>2</sup>
	Concentrated loads	Q <sub>Sd</sub>	2.25 kN

**Ultimate limit states of flexion**

$$M_{Sd,max} = q_{sd} L^2 / 8 + Q_{sd} L / 4$$

$$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$$

$$w = b \cdot e^2 / 6$$

$$M_{Sd,max} \quad 0.34 \text{ kNm/m}$$

$$M_{Rd} \quad 0.41 \text{ kNm/m} \quad \text{Security checked ( } M_{Rd} \geq M_{Sd,max} \text{ )}$$

**Ultimate limit states of shear**

$$V_{S,max} = q_{sd} L / 2 + Q_{sd} / 2$$

$$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$$

$$A_v = 5 / 6 \cdot b \cdot e$$

$$V_{S,max} \quad 1.59 \text{ kN/m}$$

$$V_{Rd} \quad 8.08 \text{ kN/m} \quad \text{Security checked ( } V_{Rd} \geq V_{S,max} \text{ )}$$

**Limit states of deformation**

Factor for quasi-permanent combination

$$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$$

$$I = b \cdot e^3 / 12$$

$$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$$

Deformation

$$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI) + Q_s \cdot L^3 / (48 \cdot EI)$$

Maximal deformation

$$\Psi_2 \quad 0.6$$

$$q_s \quad 1.38 \text{ kN/m}^2$$

$$Q_s \quad 0.90 \text{ kN}$$

$$I \quad 1829333 \text{ mm}^4$$

$$E_{mean,fin} \quad 1915 \text{ N/mm}^2$$

$$f_{max} \quad 0.99 \text{ mm}$$

$$L / 300 \quad 1.67 \text{ mm} \quad \text{Deformation verified ( } f_{max} \leq L / 300 \text{ )}$$

**Application:** Interior

**Support structure:** Wood or Metal

**Fastening:** Bonding system

**Thickness:** ≥ 19 mm (3/4")

**Board maximum size:**

3000 x 1250 mm (118,11" x 49,21")



### 1. Description

Viroc is a cement bonded particle board. It is a composite material, composed by a compressed and dry mixture of pine wood particles and cement.

Its appearance is not homogeneous. A natural characteristic of the product is to have patches of various shades.

The Viroc panel is produced in different colours.

### 2. Relative humidity effect

Viroc boards have small size variations due to the air relative humidity.

In situations of extreme humidity and temperature amplitude, the expected maximum size variation of the board would be +0.5‰ to -1.0‰.

The fastening system near the edges will have to take into account those size variations.

### 3. Application conditions

Before installation, the board must be exposed for 48 hours to the relative humidity of the location where it will be applied and should be left in a dry location out of direct sunlight.

It is the installer's responsibility to check the support structure conditions (distance between supports and respective width) for the correct application.

When applying, the temperature has to be between +5°C and +30°C, the board temperature has to be +3°C above dew point.

Primer or glues cannot be applied if it is raining or in a very damp environment (e.g. foggy).

The surface has to be clean, dry and free of dust or grease before applying primer.

This system should only be used by specialised companies that know how this kind of fastening is performed in Viroc.

### 4. Support structure

Treated dry pine beams or metallic profiles of galvanized steel and aluminum can be used to support the boards. The structure that will support Viroc boards must be aligned and leveled and the board cannot be warped. Keep the distance between the structural elements as further described.

### 5. Fastening

The attachments will be made with mastic adhesive glue. The mastic adhesion system is composed of four parts:

1 - Mastic adhesive – Polymer MS , Polyurethane Mastic or Hybrid Mastic

2 - Double-sided adhesive tape

3 - Primer for the supporting structure

4 - Primer for the Viroc board

Manufacturers that supply bonding system for panels: Bostik, Sika, 3M and Henkel.

### 6. Surface treatment

Viroc boards must be protected with paint or varnish. Before applying varnish the panel surfaces must be completely clean and dry, free from grease, dust or surface salts. The surface should be cleaned by polishing with a cleaning disc.

Viroc S.A. has suitable cleaning discs available that can be supplied on request.


The first coat must cover both sides and edges of the board. The other coats need only to be applied on exposed face and edges.

The bonding system primer applied to the back of the board cannot be mixed or applied over paint or varnish.

**Notes & recommendations**

Please consult Viroc Product Data Sheet to know the board tolerances and properties.  
Always check standard safety procedures and local legislation requirements.  
Please contact the finishing suppliers for application procedures.


**7. Board fastening**

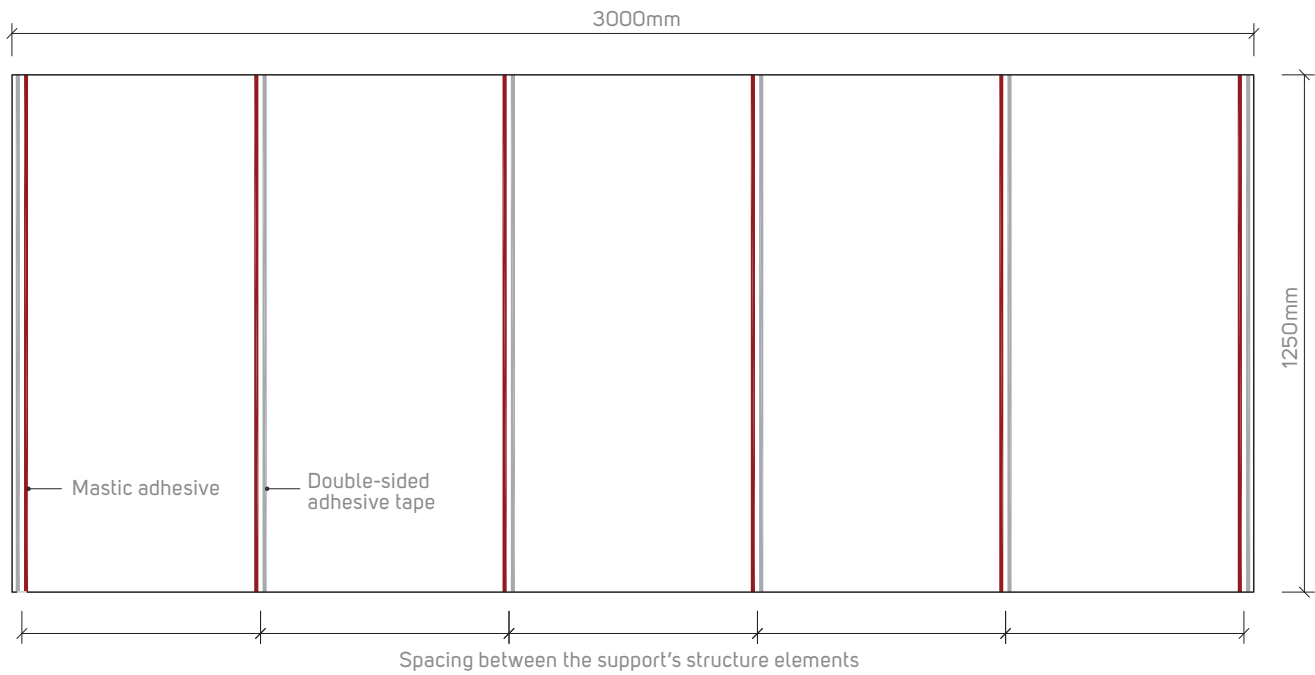




8. Construction details


Transversal section - wood structure

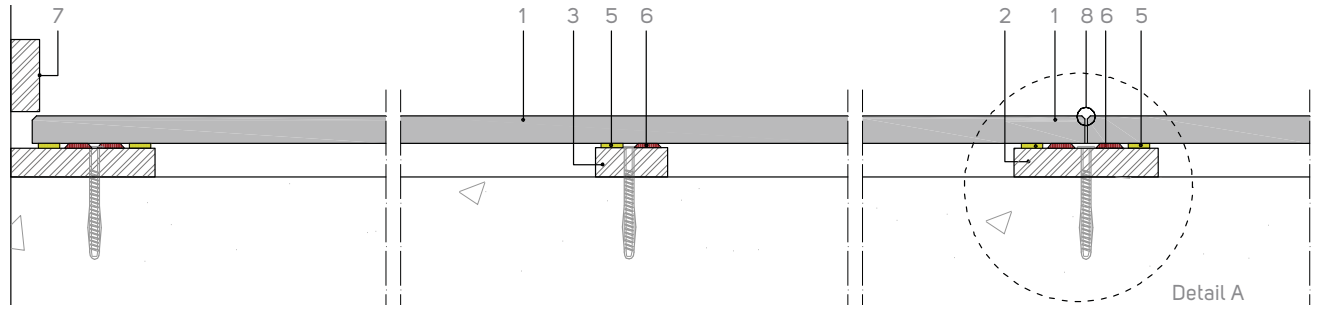

Longitudinal section - wood structure

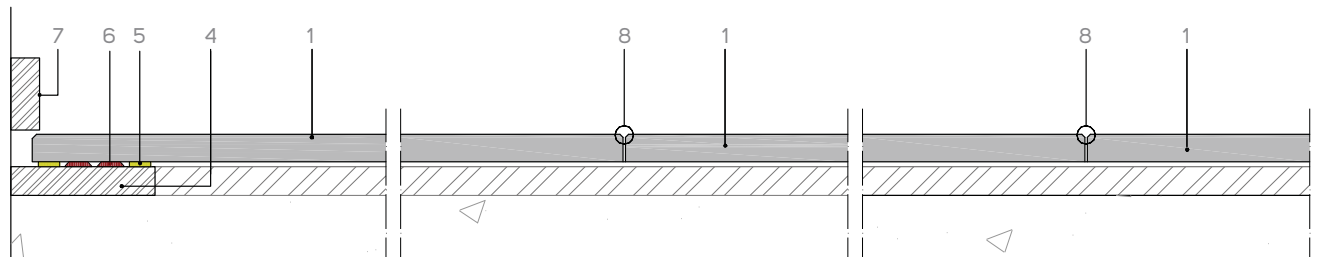

Detail A

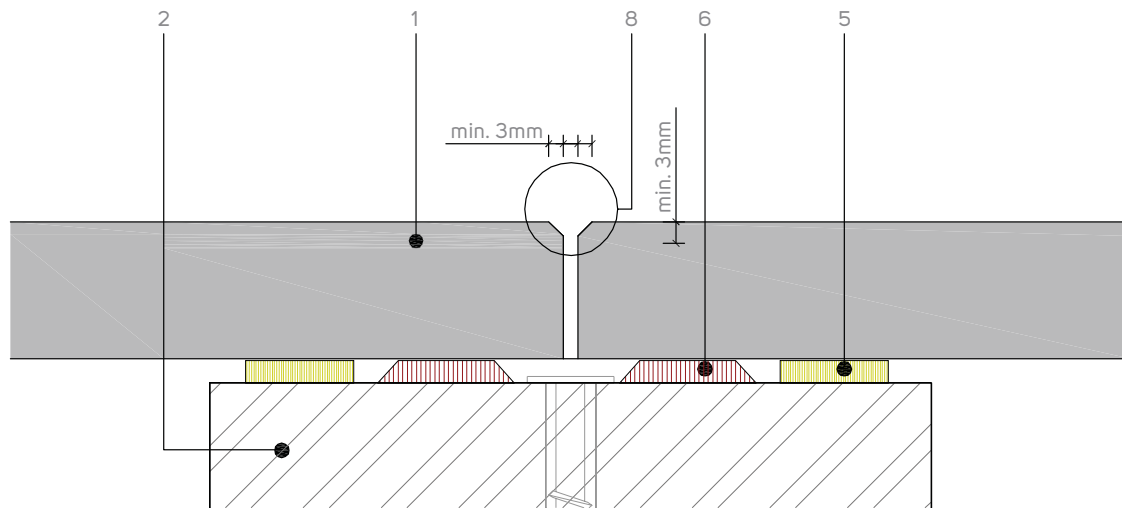


- 1 - Viroc board
- 2 - Structure between boards
- 3 - Intermediate structure
- 4 - Support structure perimeter
- 5 - Double-sided adhesive tape
- 6 - Mastic adhesive
- 7 - Skirting board
- 8 - Bevelled edge

## 9. Load table

Uniformly distributed load table

$q_k$  (kN/m<sup>2</sup>) - Static load

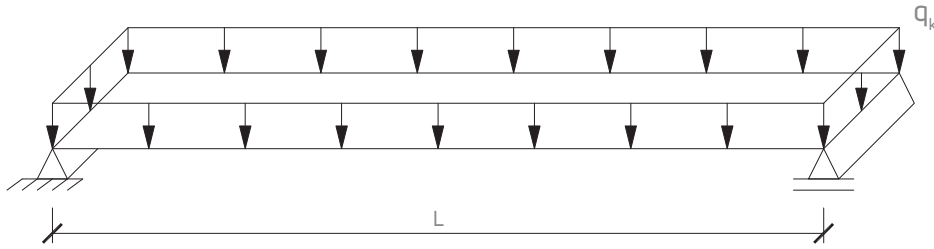

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                        4500 N/mm<sup>2</sup>

### Board resistance

L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
10	4,31	2,37	1,47	0,98	0,68	0,49	0,36	0,27
12	6,24	3,44	2,14	1,44	1,01	0,74	0,55	0,41
16	11,16	6,18	3,88	2,63	1,87	1,38	1,05	0,81
19	15,79	8,77	5,52	3,75	2,69	2,00	1,53	1,19
22	21,21	11,80	7,45	5,08	3,65	2,73	2,09	1,64
25	27,44	15,29	9,66	6,61	4,76	3,57	2,75	2,16
28	34,47	19,22	12,17	8,33	6,02	4,52	3,49	2,76
32	45,08	25,17	15,95	10,95	7,93	5,97	4,62	3,66

### Deformation limit L/300


L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
10	3,42	1,37	0,63	0,31	0,14	0,05	0,00	0,00
12	5,98	2,43	1,17	0,61	0,32	0,16	0,07	0,00
16	11,16	5,93	2,93	1,60	0,93	0,55	0,32	0,18
19	15,79	8,77	5,01	2,79	1,66	1,03	0,65	0,40
22	21,21	11,80	7,45	4,44	2,68	1,70	1,11	0,73
25	27,44	15,29	9,66	6,61	4,04	2,59	1,72	1,16
28	34,47	19,22	12,17	8,33	5,77	3,74	2,51	1,73
32	45,08	25,17	15,95	10,95	7,93	5,71	3,88	2,71

■ Values conditioned by the board's resistance

## 10. Load table

Midspan concentrated load table

$Q_k$  (kN/m) - Static load

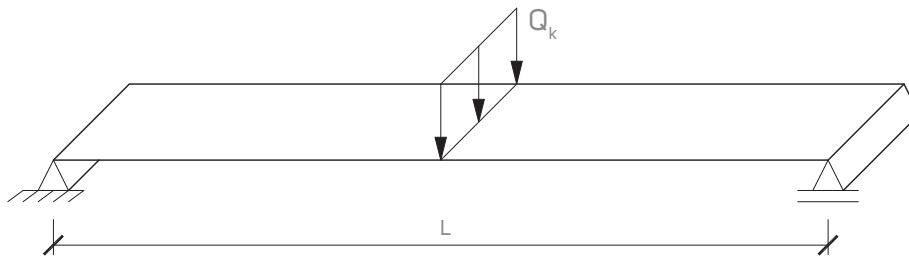

Typical breaking strength under flexing      9 N/mm<sup>2</sup>  
 Safety coefficient,  $Y_M$                               3  
 Elastic Modulus                                        4500 N/mm<sup>2</sup>

### Board resistance

	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	10	0,65	0,47	0,37	0,29	0,24	0,20	0,16	0,13
	12	0,94	0,69	0,54	0,43	0,35	0,30	0,25	0,21
	16	1,67	1,24	0,97	0,79	0,66	0,55	0,47	0,40
	19	2,37	1,75	1,38	1,13	0,94	0,80	0,69	0,59
	22	3,18	2,36	1,86	1,52	1,28	1,09	0,94	0,82
	25	4,12	3,06	2,42	1,98	1,67	1,43	1,24	1,08
	28	5,17	3,84	3,04	2,50	2,11	1,81	1,57	1,38
	32	6,76	5,03	3,99	3,28	2,77	2,39	2,08	1,83

### Deformation limit L/300

	L (m)	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1,0
Thickness (mm)	10	0,64	0,34	0,20	0,12	0,06	0,03	0,00	0,00
	12	0,94	0,61	0,36	0,23	0,14	0,08	0,04	0,00
	16	1,67	1,24	0,92	0,60	0,41	0,28	0,18	0,11
	19	2,37	1,75	1,38	1,05	0,73	0,51	0,36	0,25
	22	3,18	2,36	1,86	1,52	1,17	0,85	0,62	0,45
	25	4,12	3,06	2,42	1,98	1,67	1,30	0,97	0,73
	28	5,17	3,84	3,04	2,50	2,11	1,81	1,41	1,08
	32	6,76	5,03	3,99	3,28	2,77	2,39	2,08	1,70

■ Values conditioned by the board's resistance

## 11. Design

The design of the panel is performed in accordance with the requirements of Eurocode 5 (EN 1995-1-1).


Feature	Symbol	Value	
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>	
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>	
Modulus of elasticity	E	4500 N/mm <sup>2</sup>	
Modification factor	$k_{mod}$	Permanent action	0.30
		Long term action	0.45
		Medium term action	0.65
		Short term action	0.85
		Instantaneous action	1.10
Deformation factor	$k_{def}$	2.25	
Partial factor for material properties	$\gamma_M$	1.3	

## Technical Support

The Viroc disposes of a department that can provide technical support to its customers in the security checks.

### Example 1

#### Security verifications - Static uniform load

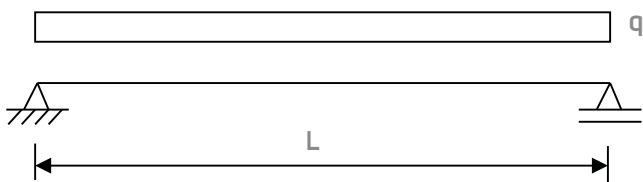

#### Characteristics

Span  $L$  0.500 m

#### Actions EN 1991-1-6 (Eurocode 1)

Covering  $c_v$  1.00 kN/m<sup>2</sup>

Variable loads  $q_k$  4.00 kN/m<sup>2</sup>

**Characteristics of Viroc board**

Board thickness	$e$	28mm
Viroc density	$\gamma$	13.5 kN/m <sup>3</sup>
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>
Modification factor (long term action)	$k_{mod}$	0.45
Deformation factor	$k_{def}$	2.25
Partial factor properties	$\gamma_M$	1.3
Self weight	$PP$	0.38 kN/m <sup>2</sup>

**Ultimate limit states EN 1995-1-1 (Eurocode 5)**

Permanent loads ( pp + cv )	$g_k$	1.38 kN/m <sup>2</sup>
Variable loads	$q_k$	4.00 kN/m <sup>2</sup>

**Design loads**

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	$q_{Sd}$	7.86 kN/m <sup>2</sup>
--	----------	------------------------

**Ultimate limit states of flexion**

$M_{Sd,max} = q_{Sd} \cdot L^2 / 8$	$M_{Sd,max}$	0.25 kNm/m
$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$	$M_{Rd}$	0.41 kNm/m    Security checked ( $M_{Rd} \geq M_{Sd,max}$ )
$w = b \cdot e^2 / 6$		

**Ultimate limit states of shear**


$V_{S,max} = q_{Sd} \cdot L / 2$	$V_{S,max}$	1.97 kN/m
$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$	$V_{Rd}$	8.08 kN/m    Security checked ( $V_{Rd} \geq V_{Sd,max}$ )
$A_v = 5 / 6 \cdot b \cdot e$		

**Limit states of deformation**

Factor for quasi-permanent combination	$\Psi_2$	0.6
$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$	$q_s$	3.78 kN/m <sup>2</sup>
$I = b \cdot e^3 / 12$	$I$	1829333 mm <sup>4</sup>
$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$	$E_{mean,fin}$	1915 N/mm <sup>2</sup>
Deformation		
$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI)$	$f_{max}$	0.88 mm
Maximal deformation	$L / 300$	1.67 mm    Deformation verified ( $f_{max} \leq L / 300$ )

Example 2

Security verifications - Static concentrated loads

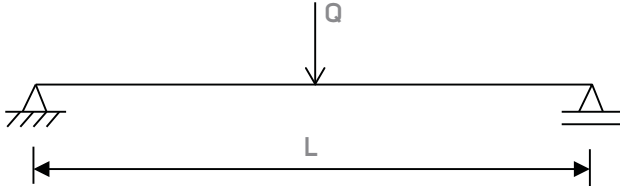

Characteristics

Span	$L$	0.500 m
------	-----	---------

Actions EN 1991-1-6 (Eurocode 1)

Covering	$cv$	1.00 kN/m <sup>2</sup>
Variable loads	$Q_k$	1.50 kN

Characteristics of Viroc board

Board thickness	$e$	28mm
Viroc density	$\gamma$	13.5 kN/m <sup>3</sup>
Bending strength	$f_{m,k}$	9.0 N/mm <sup>2</sup>
Shear strength	$f_{v,k}$	1.0 N/mm <sup>2</sup>
Modulus of elasticity	$E$	4500 N/mm <sup>2</sup>
Modification factor (long term action)	$k_{mod}$	0.45
Deformation factor	$k_{def}$	2.25
Partial factor properties	$\gamma_M$	1.3
Self weight	$pp$	0.38 kN/m <sup>2</sup>

Ultimate limit states EN 1995-1-1 (Eurocode 5)

Permanent loads ( $pp + cv$ )	$g_k$	1.38 kN/m <sup>2</sup>
Variable loads	$Q_k$	1.50 kN

Design loads

$q_{Sd} = 1,35 \cdot g_k + 1,50 \cdot q_k$	Uniform loads	$q_{Sd}$	1.86 kN/m <sup>2</sup>
	Concentrated loads	$Q_{Sd}$	2.25 kN

### Ultimate limit states of flexion

$$M_{Sd,max} = q_{sd} L^2 / 8 + Q_{sd} L / 4$$

$$M_{Rd} = k_{mod} \cdot w \cdot f_{m,k} / \gamma_M$$

$$w = b \cdot e^2 / 6$$

$$M_{Sd,max} \quad 0.34 \text{ kNm/m}$$

$$M_{Rd} \quad 0.41 \text{ kNm/m} \quad \text{Security checked ( } M_{Rd} \geq M_{Sd,max} \text{ )}$$

### Ultimate limit states of shear

$$V_{S,max} = q_{sd} L / 2 + Q_{sd} / 2$$

$$V_{Rd} = k_{mod} \cdot A_v \cdot f_{v,k} / \gamma_M$$

$$A_v = 5 / 6 \cdot b \cdot e$$

$$V_{S,max} \quad 1.59 \text{ kN/m}$$

$$V_{Rd} \quad 8.08 \text{ kN/m} \quad \text{Security checked ( } V_{Rd} \geq V_{S,max} \text{ )}$$

### Limit states of deformation

Factor for quasi-permanent combination

$$q_s = 1,00 \cdot g_k + \Psi_2 \cdot q_k$$

$$I = b \cdot e^3 / 12$$

$$E_{mean,fin} = E / (1 + \Psi_2 \cdot k_{def})$$

Deformation

$$f_{max} = 5 \cdot q_s \cdot L^4 / (384 \cdot EI) + Q_s \cdot L^3 / (48 \cdot EI)$$

Maximal deformation

$$\Psi_2 \quad 0.6$$

$$q_s \quad 1.38 \text{ kN/m}^2$$

$$Q_s \quad 0.90 \text{ kN}$$

$$I \quad 1829333 \text{ mm}^4$$

$$E_{mean,fin} \quad 1915 \text{ N/mm}^2$$

$$f_{max} \quad 0.99 \text{ mm}$$

$$L / 300 \quad 1.67 \text{ mm} \quad \text{Deformation verified ( } f_{max} \leq L / 300 \text{ )}$$

**Application:** Interior

**Underlying structure:** New or existing floor

**Laying:** Set with elastic polyurethane mortar

**Thickness:**  $\geq 12$  mm (1/2")

**Board maximum size:** 3000 x 1250 mm (118,1" x 49,2")

### 1. Description

Viroc is a cement bonded particle board. It is a composite material, composed by a compressed and dry mixture of pine wood particles and cement.

Its appearance is not homogeneous. A natural characteristic of the product is to have patches of various shades.

The Viroc panel is produced in different colours.

### 2. Relative humidity effect

Viroc boards have small size variations due to the air relative humidity.

Where indoor humidity and temperature range widely, Viroc panels should be expected to shrink and expand between +0.5 ‰ and -1.50 ‰.

As such, the mortar used to set the panels must be strong but elastic enough to allow for such variation.

### 3. Application conditions

Before installation, the board must be exposed for 48 hours to the relative humidity of the location where it will be applied and should be left in a dry location out of direct sunlight.

Viroc panels used as flooring can be laid on a new or pre-existing floor. The floor needs to be levelled, in a good state of repair, and the surfaces must be cleaned of dirt and grease to ensure a good bond for the polyurethane mortar.

The ambient temperature when laying needs to be between +10°C and +25°C, the panel temperature must be +3°C above the dew point, and the relative humidity of the air must not exceed 80%.

The installer is liable for ensuring the aforesaid conditions are satisfied.

### 4. Laying

The panels are laid using an elastic polyurethane mortar spread across the entire surface using a notched trowel.



The following polyurethane mortars are suitable for this kind of application:

- SIKA: Sikabond AT 80, Sikabond 50 Parquet.
- BOSTIK: Tarbicol PU, Tarbicol MS Elastic.

Other branded products may be used, depending on the manufacturers' indications. Further information should be requested from the product suppliers.

### 5. Joint spacing

Spaces between panels should be from 2 mm (1/12") to 3 mm (1/8"), with a bevel or chamfer of at least 2 mm (1/12") on the edges of the upper surface.

The spaces should be filled using a polyurethane-based grout.



## 6. Surface preparation

The panels should be protected using scratch-proof varnish or paint suitable for floors.

Before varnishing the panels, the surface should be fully cleaned and dried, free of surface grease, dust, or salts, and should be polished using a disc polisher or fine-grained sandpaper (180 grit or above).

Viroc can supply pre-polished panels and has suitable disc polishers which can be supplied on request.

The panels can be varnished after they are laid. For the number of coats required, please follow the manufacturer's recommendations.


### Notes & recommendations

Please consult the product specifications for information on the panels' tolerances and properties.


Always observe standard safety procedures and local by-laws. We recommend you request the specifications and user instructions of any finishing products directly from the manufacturers.

## 7. Construction details


### Section

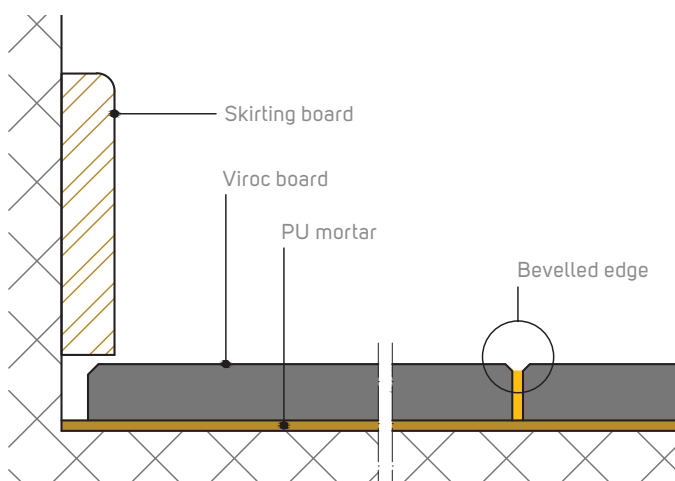

### Spacing detail

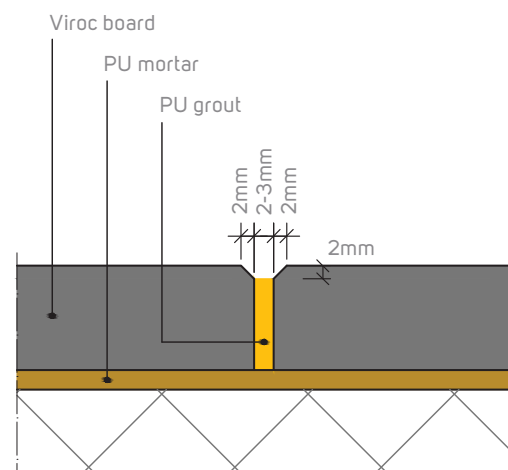

### Floor panels set using elastic polyurethane mortar

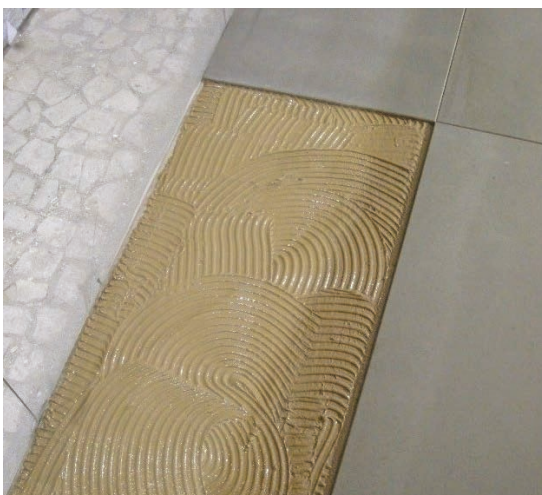

**Application:** Indoors

**Support structure:** High-density PVC supports

**Thickness unsanded:** 22 mm (7/8"), 25 mm (1"), 28 mm (1 1/8") or 32 mm (1 1/4").


**Thickness sanded:** 21mm (13/16"), 24mm (15/16"), 28mm (1 1/8") or 32 mm (1 1/4").

**Board size:**

400 x 400 mm (15,75" x 15,75")

500 x 500 mm (19,685" x 19,685")

600 x 600 mm (23,62" x 23,62")

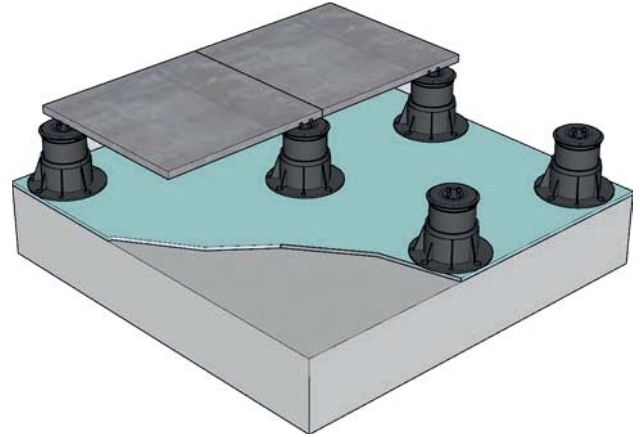

### 1. Description

Viroc is a cement bonded particle board. It is a composite material, composed by a compressed and dry mixture of pine wood particles and cement.

Its appearance is not homogeneous. A natural characteristic of the product is to have patches of various shades.

### 2. Application Conditions

Before installation, the board must be exposed for 48 hours to the relative humidity of the location where it will be applied and should be left in a dry location out of direct sunlight.

It is the installer's responsibility to check the support structure conditions for the correct application.

### 3. Support structure

High-density PVC supports are used to support the boards. PVC supports are placed at the corners of each board and each one can carry 4 boards. Each support has a leveling device to perform leveling 0-5% when necessary.

Boards are supported on the PVC supports, placed on a floor slab. PVC supports may be fixed to the base through bushings.

Joints between boards must be 2 mm, 4.5 mm, 6 mm, 8 mm or 10 mm.

### 4. Surface treatment

The final finish may involve the traditional surfacing materials.


### Notes & recommendations

Please consult Viroc Product Data Sheet to know the board tolerances and properties.


Always check standard safety procedures and local legislation requirements.

Please contact the finishing suppliers for application procedures.


**6. Transversal section**

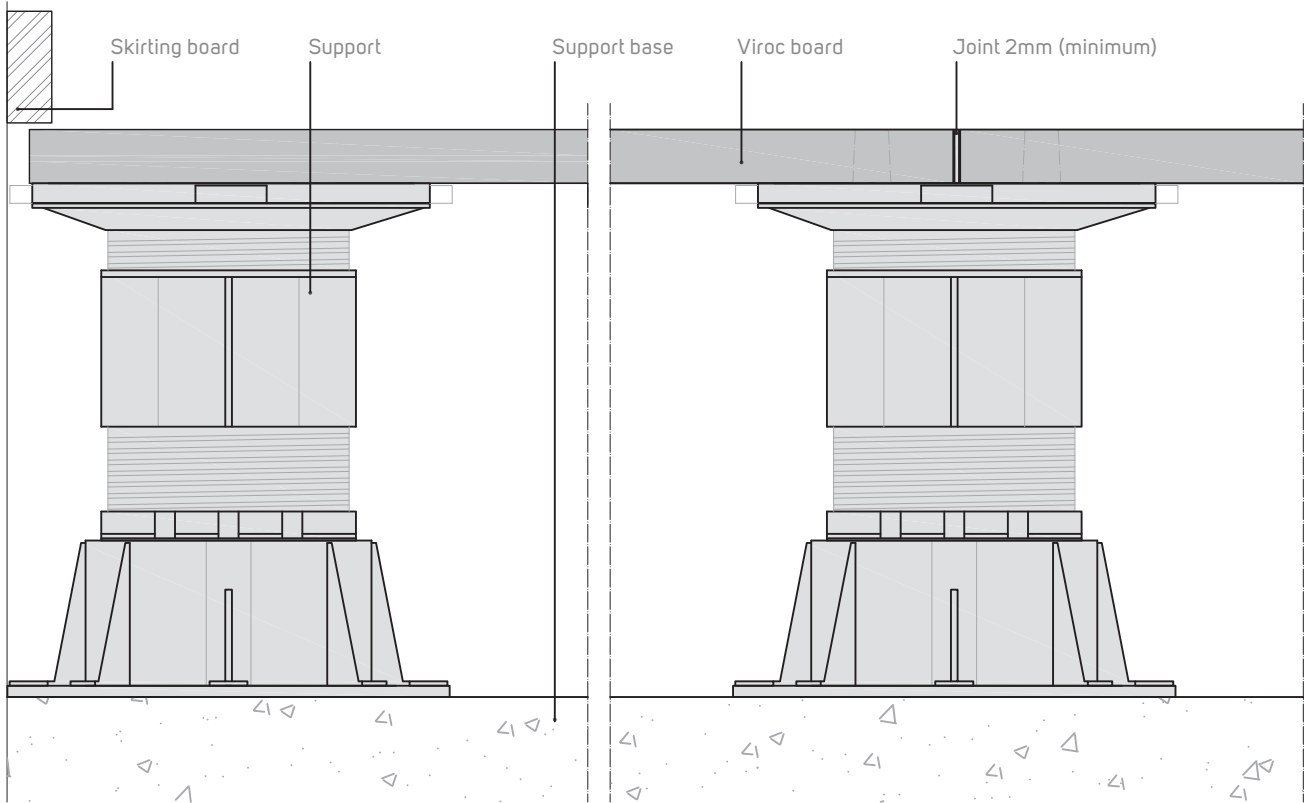


**7. Bevel board**

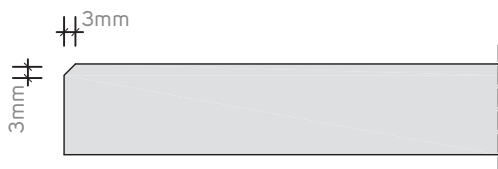

**8. Standard boards**

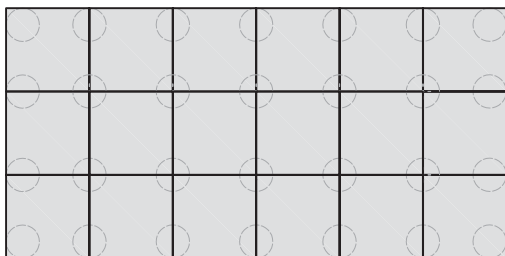


**9. Support elements**

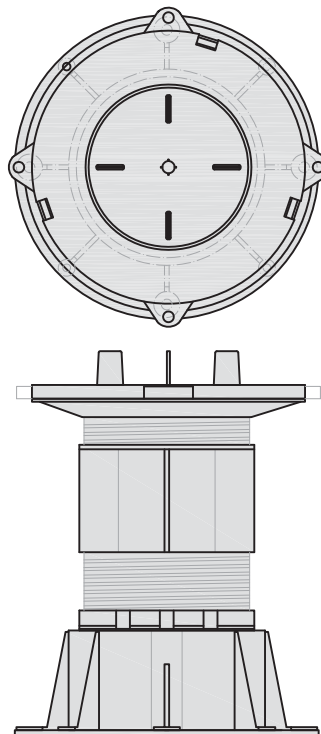

## 10. Load table

### Uniformly distributed load table - Static load

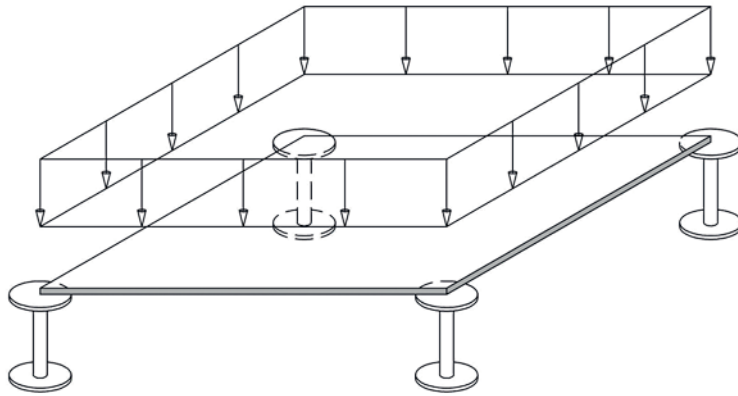

Bending strength 9 N/mm<sup>2</sup>  
 Modulus of Elasticity in bending 4500 N/mm<sup>2</sup>

#### Load table 400x400mm q (kN/m<sup>2</sup>)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	21,2	10,6	7,1
21 (*)	26,0	13,0	8,7
22	28,5	14,3	9,5
24 (*)	34,0	17,0	11,3
25	36,9	18,4	12,3
28	46,3	23,1	15,4
32	60,5	30,3	20,2
36	76,7	38,3	25,6
40	94,7	47,3	31,6

(\*) Thickness only produced in sanded board

#### Load table 500x500mm q (kN/m<sup>2</sup>)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	13,5	6,7	4,5
21 (*)	16,5	8,2	5,5
22	18,1	9,0	6,0
24 (*)	21,5	10,8	7,2
25	23,4	11,7	7,8
28	29,4	14,7	9,8
32	38,5	19,2	12,8
36	48,7	24,4	16,2
40	60,2	30,1	20,1

(\*) Thickness only produced in sanded board

#### Load table 600x600mm q (kN/m<sup>2</sup>)


Thickness	Collapse	FS = 2.0	FS = 3.0
19	9,3	4,6	3,1
21 (*)	11,4	5,7	3,8
22	12,5	6,2	4,2
24 (*)	14,9	7,4	5,0
25	16,2	8,1	5,4
28	20,3	10,2	6,8
32	26,6	13,3	8,9
36	33,7	16,9	11,2
40	41,7	20,9	13,9

(\*) Thickness only produced in sanded board

Note: These values were calculated analytically.

## 11. Load table

### Concentrated load table - Static load

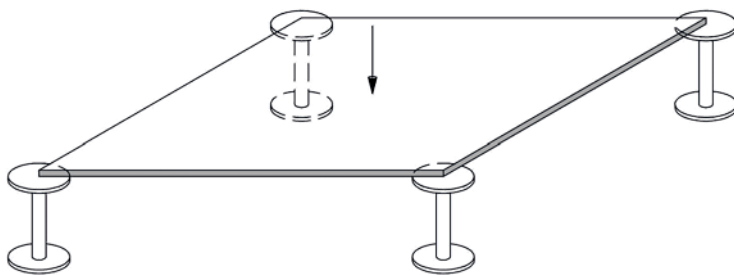

Bending strength 9 N/mm<sup>2</sup>  
 Modulus of Elasticity in bending 4500 N/mm<sup>2</sup>

#### Load table 400x400mm Q (kN)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	1,3	0,7	0,4
21 (*)	1,6	0,8	0,5
22	1,8	0,9	0,6
24 (*)	2,1	1,1	0,7
25	2,3	1,1	0,8
28	2,9	1,4	1,0
32	3,8	1,9	1,3
36	4,8	2,4	1,6
40	5,9	2,9	2,0

(\*) Thickness only produced in sanded board

#### Load table 500x500mm Q (kN)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	1,3	0,6	0,4
21 (*)	1,5	0,8	0,5
22	1,7	0,8	0,6
24 (*)	2,0	1,0	0,7
25	2,2	1,1	0,7
28	2,7	1,4	0,9
32	3,6	1,8	1,2
36	4,5	2,3	1,5
40	5,6	2,8	1,9

(\*) Thickness only produced in sanded board

#### Load table 600x600mm Q (kN)


Thickness	Collapse	FS = 2.0	FS = 3.0
19	1,2	0,6	0,4
21 (*)	1,5	0,7	0,5
22	1,6	0,8	0,5
24 (*)	1,9	1,0	0,6
25	2,1	1,0	0,7
28	2,6	1,3	0,9
32	3,4	1,7	1,1
36	4,4	2,2	1,5
40	5,4	2,7	1,8

(\*) Thickness only produced in sanded board

**Note:** These values were calculated analytically.

## 12. Load table

### Edge Concentrated load table - Static load

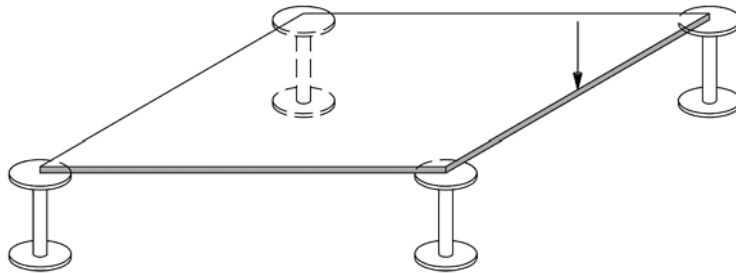

Bending strength 9 N/mm<sup>2</sup>  
 Modulus of Elasticity in bending 4500 N/mm<sup>2</sup>

#### Load table 400x400mm Q (kN)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	0,6	0,3	0,2
21 (*)	0,7	0,4	0,2
22	0,8	0,4	0,3
24 (*)	1,0	0,5	0,3
25	1,0	0,5	0,3
28	1,3	0,7	0,4
32	1,7	0,9	0,6
36	2,2	1,1	0,7
40	2,7	1,3	0,9

(\*) Thickness only produced in sanded board

#### Load table 500x500mm Q (kN)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	0,6	0,3	0,2
21 (*)	0,7	0,3	0,2
22	0,8	0,4	0,3
24 (*)	0,9	0,5	0,3
25	1,0	0,5	0,3
28	1,2	0,6	0,4
32	1,6	0,8	0,5
36	2,0	1,0	0,7
40	2,5	1,3	0,8

(\*) Thickness only produced in sanded board


#### Load table 600x600mm Q (kN)

Thickness	Collapse	FS = 2.0	FS = 3.0
19	0,5	0,3	0,2
21 (*)	0,7	0,3	0,2
22	0,7	0,4	0,2
24 (*)	0,9	0,4	0,3
25	0,9	0,5	0,3
28	1,2	0,6	0,4
32	1,5	0,8	0,5
36	2,0	1,0	0,7
40	2,4	1,2	0,8


(\*) Thickness only produced in sanded board

**Note:** These values were calculated analytically.


## Viroc pavement with mineral wool

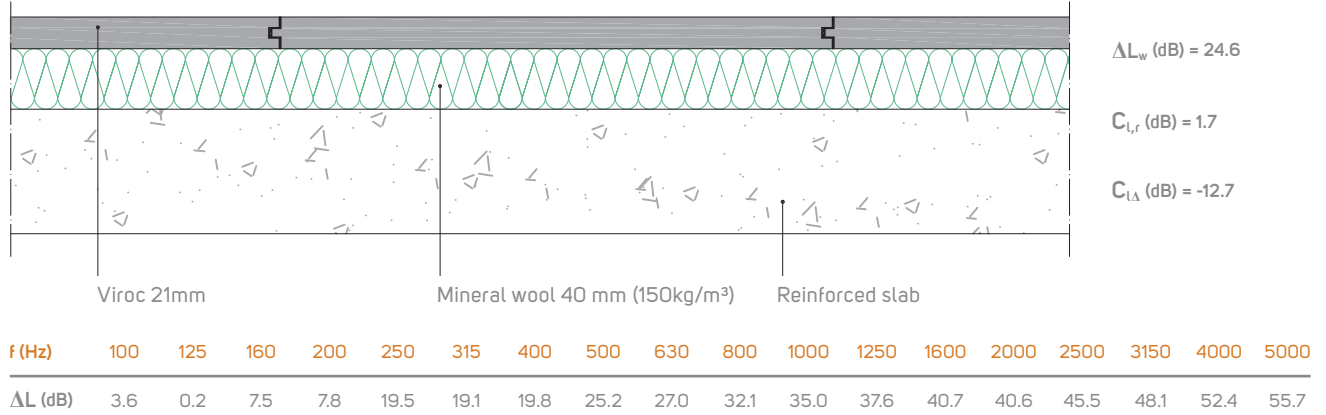

## Viroc pavement with mineral wool, coated with ceramic

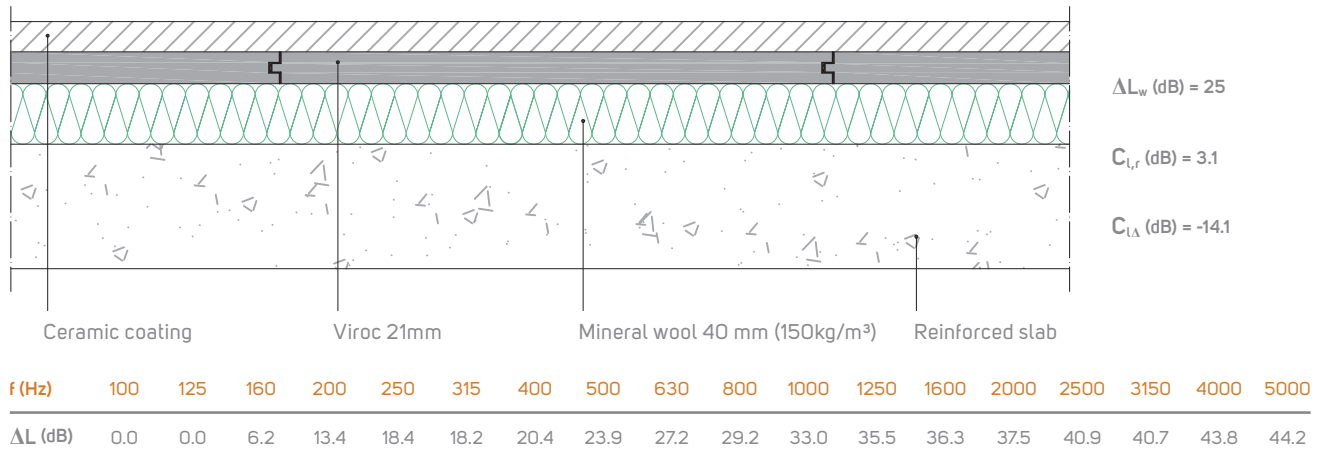


## Viroc pavement with mineral wool, coated with ceramic and cork

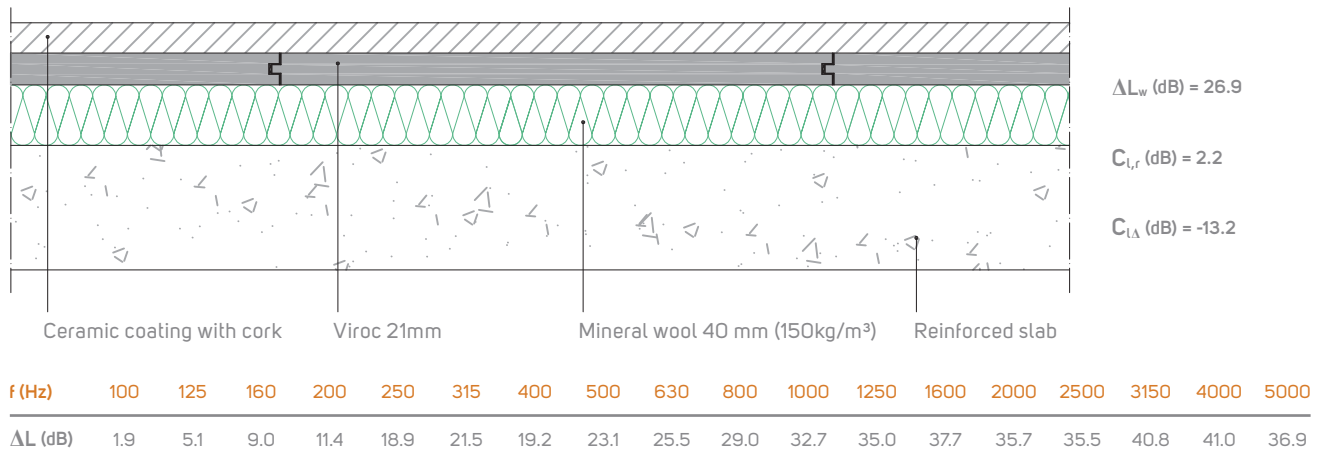


Tests performed according to EN ISO 140-8 and EN ISO 717-2.


## Viroc pavement with mineral wool, coated with cork

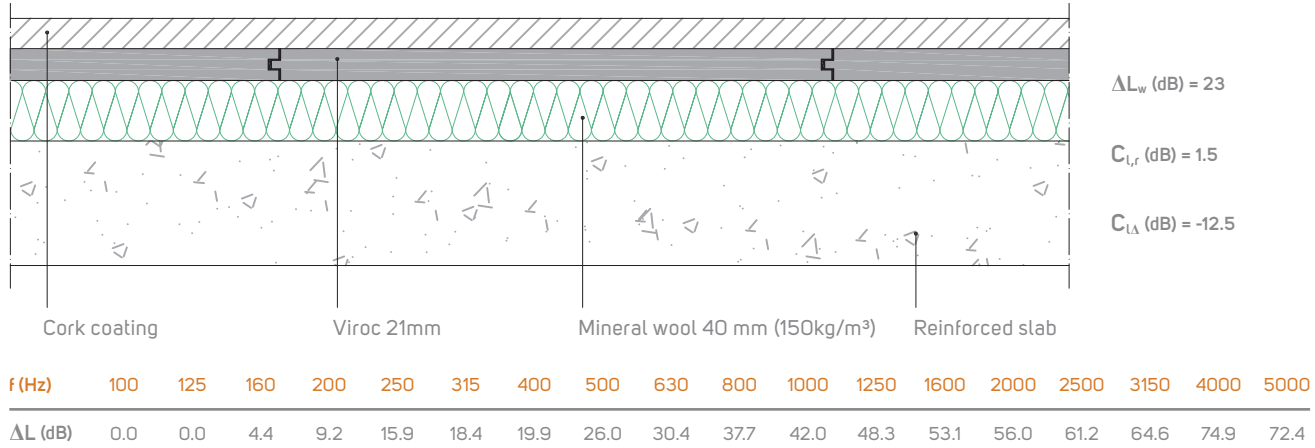

## Viroc pavement with mineral wool, coated with "parquet"

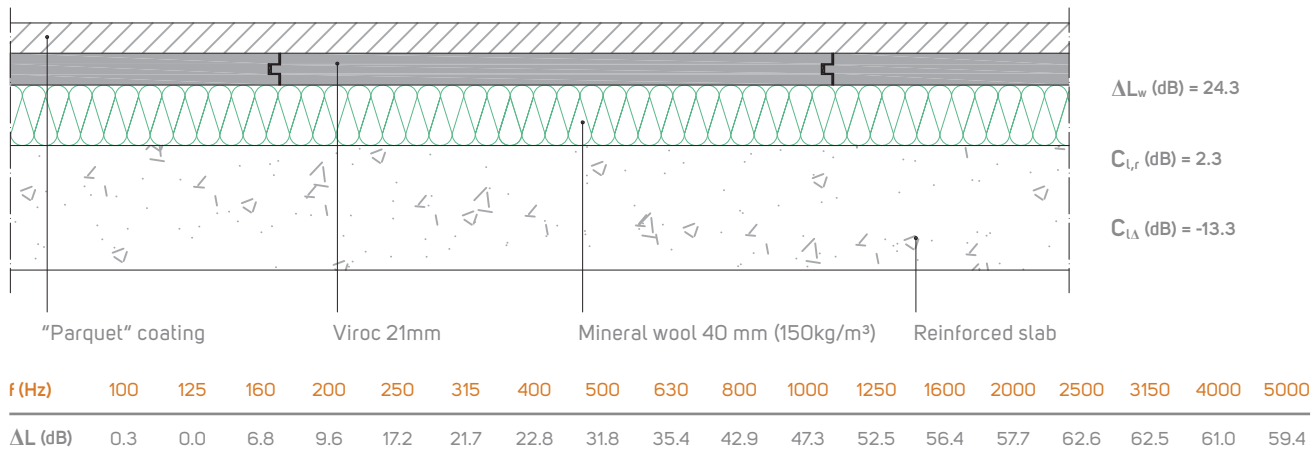


## Viroc pavement with mineral wool, coated with "Lamparquet"

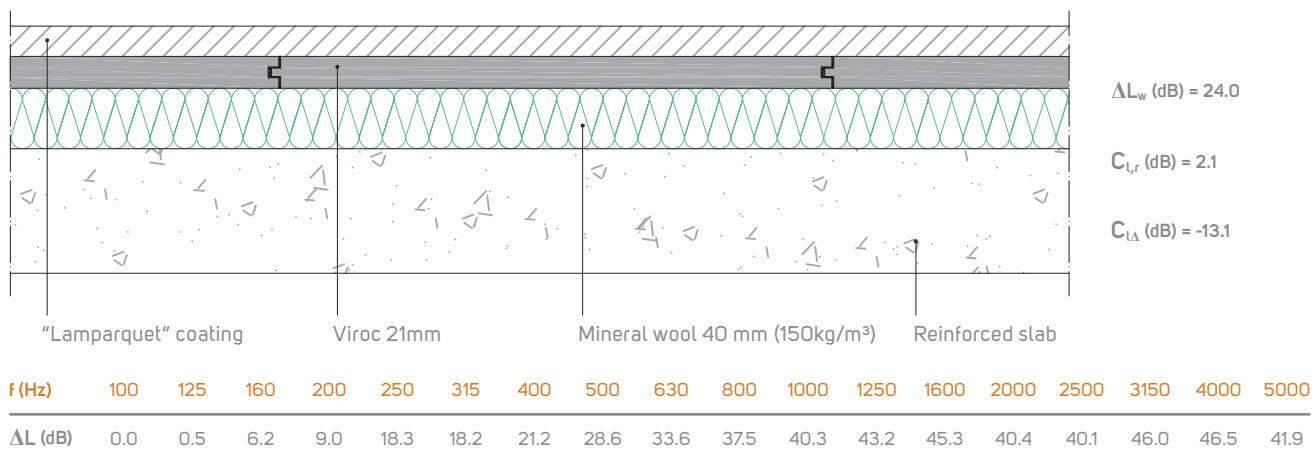

Tests performed according to EN ISO 140-8 and EN ISO 717-2.



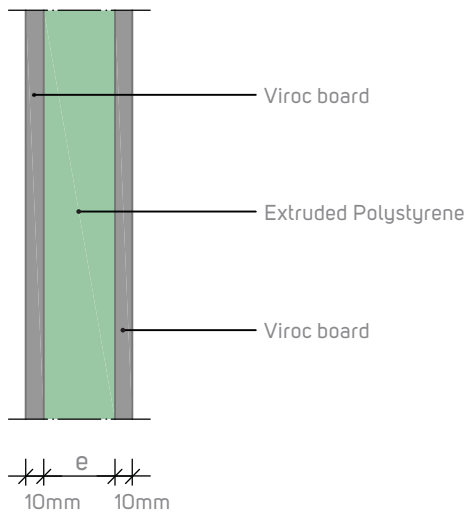

e (mm)	Board	Dimension	Weight (Kg)
40	10-40-10	2400x550x66 mm	29,40
50	10-50-10	2400x550x76 mm	29,70
60	10-60-10	2400x550x86 mm	30,10
80	10-80-10	2400x550x106 mm	30,80

## Thermal properties

e (mm)	Designation	Kcal/h.m <sup>2</sup> .°C	W/m <sup>2</sup> .°C
40	10-40-10	0,45	0,52
50	10-50-10	0,37	0,44
60	10-60-10	0,32	0,38
80	10-80-10	0,25	0,29

## Load for L/250 | Kg/m<sup>2</sup>

e (mm)	Designation	Load (Kg/m <sup>2</sup> )		
		1200mm	800mm	600mm
40	10-40-10	464	1083	1170
50	10-50-10	496	1166	1440
60	10-60-10	680	1453	1600
80	10-80-10	740	1606	1893

## Reaction to fire: B-s2, d0

Tests performed with CVXV Calister sandwich board

